


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	9/12/00	TJC
B	REVISED; ADDED COLOR CODE (ECN 1510)	09/18/0	MCCORMICK
C	ECN 3330: CN RELEASE	5/16/08	D.CASTRO
D	ECN 6792: UPDATED LOGO, DRW FORMAT, PACKAGING, ADDED PANTONE #	4/10/13	D. DESJARDIN

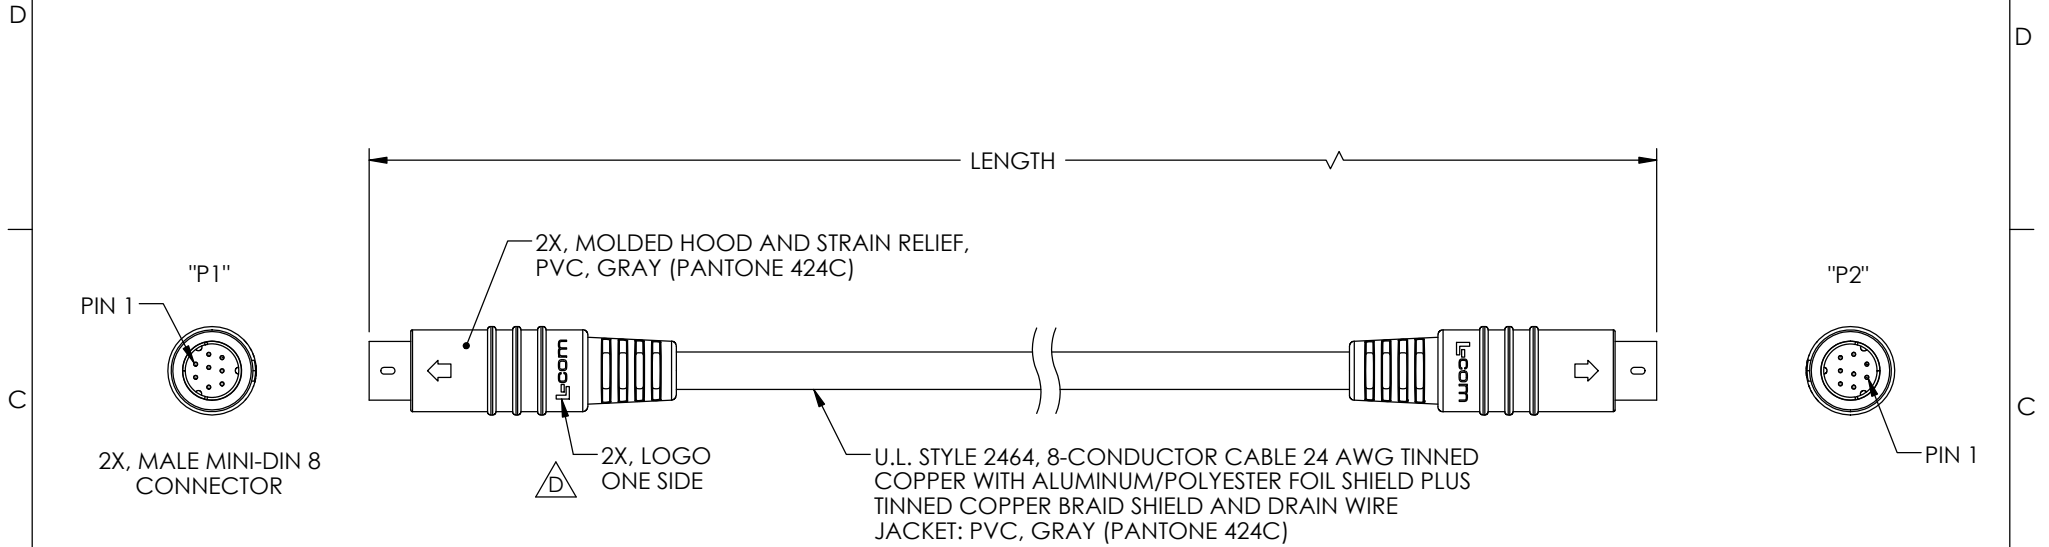

MODEL NUMBER	LENGTH	
	FEET	METERS
DK238MM-1	1.0	0.30
DK238MM-2	2.0	0.61
DK238MM-3	3.0	0.91
DK238MM-6	6.0	1.83
DK238MM-10	10.0	3.05
DK238MM-15	15.0	4.57
DK238MM-20	20.0	6.10
DK238MM-25	25.0	7.62

WIRING MAP		
"P1"	COLOR	"P2"
1	LT. BLUE	1
2	LT. GREEN	2
3	PURPLE	3
4	WHITE	4
5	ORANGE	5
6	YELLOW	6
7	BROWN	7
8	RED	8
SHELL	DRAIN	SHELL

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%</p> <p>ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm .2$ $.XX = \pm .02$ $.XXX = \pm .005$</p> <p>PROJECTION</p>	<p>APPROVALS</p> <p>TJC</p> <p>DFP</p> <p>RC</p>	<p>DATE</p> <p>8/31/00</p> <p>9/7/00</p> <p>9/12/00</p>	<p>L-com Global Connectivity</p> <p>45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845</p> <p>CATEGORY</p> <p>I/O PRODUCTS</p> <p>PRODUCT DESCRIPTION</p> <p>CBL MD8 MALE/ MD8 MALE</p>	
	<p>CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY</p>			<p>SIZE</p> <p>A</p>
	<p>COLOR VARIATIONS MAY OCCUR</p>			<p>FSCM NO.</p> <p>43321</p> <p>DWG. NO.</p> <p>DK238MM</p>
	<p>SCALE: NONE</p>			<p>CAD FILE: DK238MM.SLDDRW</p> <p>SHEET 1 OF 1</p>