
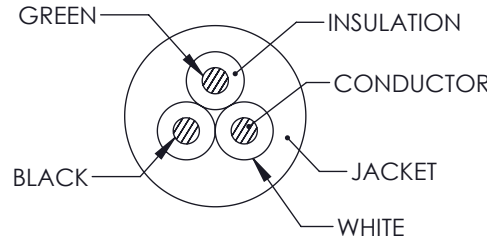


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	19-10-2021	GUTTADAURO

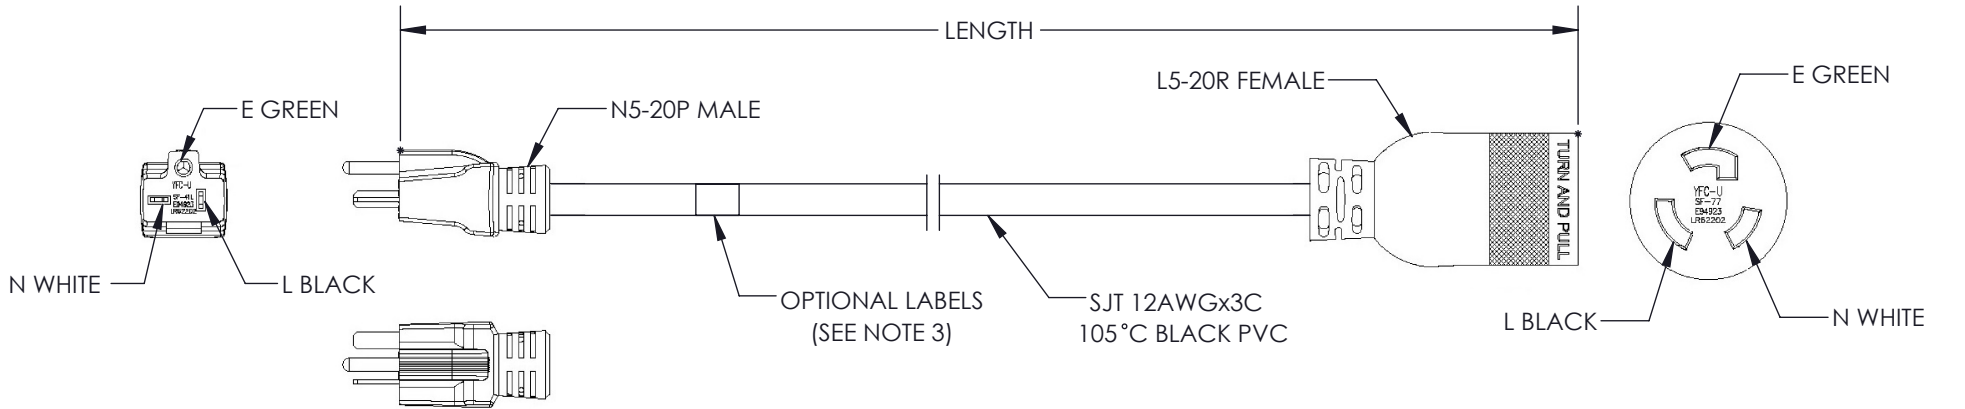

ITEM NUMBER	LENGTH INCHES [MM]
N520P-L520R-20-1F	12.0 ± 0.6 [305 ± 15.0]

**NOTES:**

- VOLTAGE RATING:  
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec  
CONDUCTOR RESISTANCE ≤ 5.58Ω/1000M  
VOLTAGE RATING AC 300V
- CABLE MARKING :  
(UL) E135710-F5 SJT 3X12AWG 105°C 300V VW-1  
c(UL) SJT 3X3.31mm2(12AWG) 105°C 300V FT2
- OPTIONAL LABELS:  
OPTIONAL LABEL(S) MAY INCLUDE  
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0031.
- ALL DIMENSIONS FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [0.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY MVEERAPPAN	19-10-2021		CATEGORY <b>POWER PRODUCTS</b>
	CHECKED BY DFRISIELLO	19-10-2021		
	APPROVED BY GUTTADAURO	19-10-2021		
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION N5-20P - L5-20R Lck Power Cord, 20A, 125V	SIZE <b>A</b>	
	COLOR VARIATIONS MAY OCCUR	CAGE CODE <b>43321</b>	ITEM NO. N520P-L520R-20	
SCALE: NONE		CAD FILE: N520P-L520R-20.SLDDRW	REV. <b>A</b>	
SHEET 1 OF 1				