REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7677: CHANGE REAR JACK HOUSING FROM PC/ABS TO ABS	11/12/14	D.FRISIELLO

84.0
[2133.6]

(FRONT HOUSING)

(REAR HOUSING)

.63
[16]

1.07
[27.3]

.87
[22.1]

PIN 2

"J1"
RJ11 JACK
(6P4C)

PIN 2

"P1"
RJ11 PLUG
(6P4C)
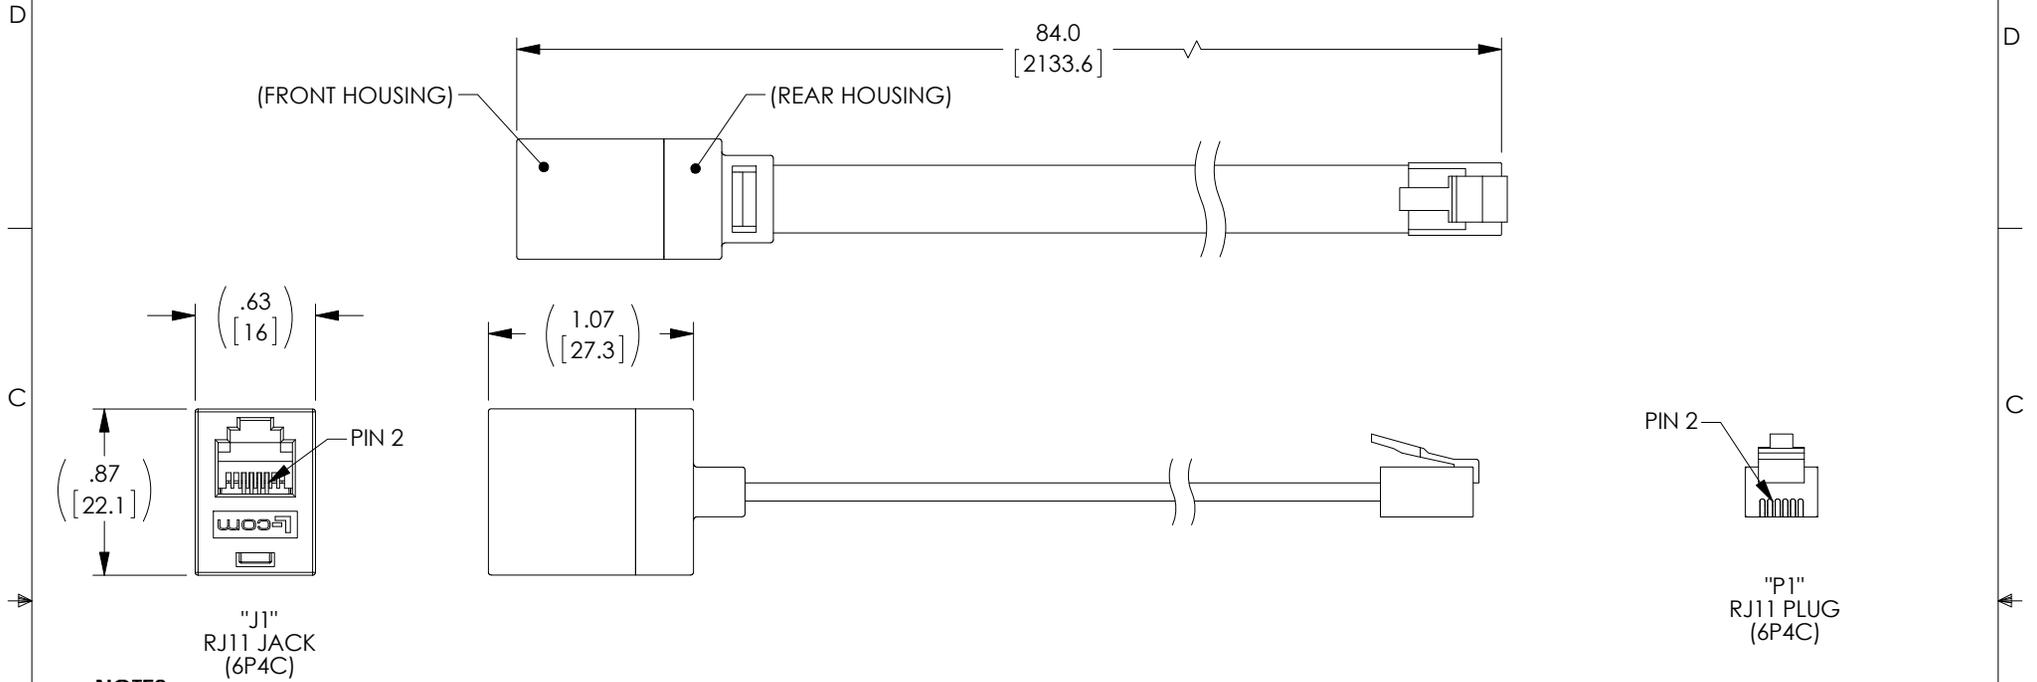
NOTES:

MATERIAL:
PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
JACK HOUSING, FRONT: ABS, IVORY, PANTONE 7501C.
⚠E JACK HOUSING, REAR: ABS, IVORY, PANTONE 7501C.
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: PVC, IVORY

FINISH:
CONTACTS: GOLD PLATING IN CONTACT AREA
OVER NICKEL PLATE OVERALL.

CABLE CHARACTERISTICS:
4 CONDUCTOR FLAT MODULAR CORD,
U.L. STYLE 20251, 26 AWG STRANDED (7X34)

MISCELLANEOUS:
PLUG CONFORMS TO TIA-1096
OPERATING TEMPERATURE RANGE: -20°C TO +60°C
EXTENSION CABLES TO BE TESTED FOR CONTINUITY
EXTENSION CABLES TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

WIRING MAP	
"J1"	"P1"
2	2
3	3
4	4
5	5

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]

APPROVALS	DATE
DRAWN BY D PARHAM	4/20/2001
CHECKED BY T CLARK	4/24/2001
APPROVED BY R CARRICK	4/26/2001

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

PROJECTION

COLOR VARIATIONS
MAY OCCUR

L-COM Global Connectivity

45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
TELECOM/MODULAR

PRODUCT DESCRIPTION
EXTENDER,(6P4C) M/F STRAIGHT

SIZE A	FSCM NO. 43321	DWG. NO. TAC535-4-7	REV. E
SCALE: NONE	CAD FILE: TAC535-4-7.SLDDRW		SHEET 1 OF 1

REF