


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	04/26/2021	GUTTADAURO

**CROSS-SECTIONAL VIEW**

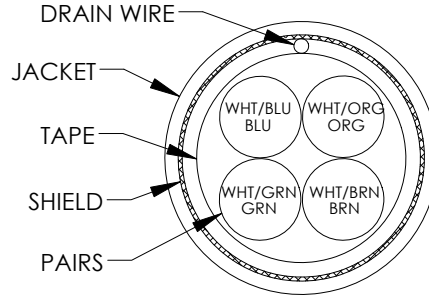

**COLOR CODE:**

- 1) WHITE/BLUE x BLUE
- 2) WHITE/ORANGE x ORANGE
- 3) WHITE/GREEN x GREEN
- 4) WHITE/BROWN x BROWN

**NOTES:**

**1. CONSTRUCTION:**

CONDUCTOR: 24 AWG SOLID BARE COPPER  
 INSULATION: HIGH DENSITY POLYETHYLENE, .011" NOM. WALL THICKNESS  
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS  
 CABLE: (4) TWISTED PAIRS TWISTED TOGETHER AND WRAPPED WITH AN OVERALL POLYESTER TAPE TO FORM A CABLE CORE  
 SHIELD: AN OVERALL POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL CONTAIN A 24 AWG SOLID TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE  
 JACKET: POLYVINYLCHLORIDE, BLACK, .035" NOM. WALL THICKNESS

NOM. DIA.  
 .0215"  
 .044" MAX.  
 .088"  
 .208"  
 .218"  
 .288"  
 (BY PI TAPE)

**2. PHYSICAL PROPERTIES:**

TEMPERATURE RATING, MAX. 75°C & 80°C  
 TEMPERATURE RATING, MIN. -20°C  
 WT./M', NOM., NET. 36.6 LBS.  
 JACKET IS UV RESISTANT  
 JACKET IS OIL RESISTANT PER UL 2556

**3. AGENCY APPROVALS:**

UL AWM STYLE 2463  
 NEC (UL) TYPE CMX OUTDOOR - CMG/CMR  
 CEC C(UL) TYPE CMX OUTDOOR - CMG/CMR  
 MEETS EU DIRECTIVE 2011/65/EU (RoHS II)

**4. APPLICATION:**

HORIZONTAL CABLE FOR 568.2-D CATEGORY 5e APPLICATIONS. CABLE MEETS UL 1666 AND HAS BEEN FOUND TO MEET THE STANDARD CRITERIA FOR FT4/IEEE 1202, PER UL 444.

**5. PRINT: (WHITE INK)**

QUABBIN DATAMAX EXTREME TOUGH CAT 5e 200 MHZ F/UTP HORIZONTAL CABLE P/N 5940 C(UL)US CMX OUTDOOR - CMR 24 AWG 75C SUN RES OR AWM 2463 80C 600V -- CAT 5e TIA - 568.2-D -- CE RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

**6. ELECTRICAL CHARACTERISTICS:**

CAPACITANCE, MUTUAL, MAX. 15 PF/FT. AT 1 MHZ @20°C  
 DIELECTRIC WITHSTANDING, MIN. 2000V RMS  
 VOLTAGE RATING, MAX. 600V  
 D.C. RESISTANCE, MAX. 26.2 Ω /1000 FT (8.59 Ω /100M) @20°C  
 IMPEDANCE, NOM. 100 +/- 15 Ω, 1 - 200 MHZ

**RETURN LOSS:**

1 ≤ f < 10 MHz 20 + 6 LOG (f) dB MIN  
 10 ≤ f < 20 MHz 26dB MIN  
 20 ≤ f < 200 MHz 26 - 5 LOG(f/20) dB MIN

**7. PACKAGING:**

PART NUMBER	PACKAGING
TOFIC5E-BLK-100F	COIL
TOFIC5E-BLK-500F	SPOOL
TOFIC5E-BLK-1000F	SPOOL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] - 60 [1524] = +2 [51] / -0 >60 [1524] - 120 [3048] = +4 [102] / -0 >120 [3048] - 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .2 [5.08] .XX = .02 [51] .XXX = .005 [1.27]	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DFRISIELLO	04/26/2021		
	CHECKED BY DGUTTADAURO	04/26/2021	CATEGORY TELECOM/MODULAR	
	APPROVED BY DGUTTADAURO	04/26/2021	PRODUCT DESCRIPTION Bulk C5e 4P F/UTP POE 24SLD CMR-CMX PVC BLK	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. TOFIC5E-BLK	REV. <b>A</b>
			SCALE: N/A	CAD FILE: TOFIC5E-BLK.SLDRW
				SHEET 1 OF 1