

N Male to N Female Cable Assembly using RG58 Coax, 6 FT



**LCCA30671-FT6**

**Configuration**


- Connector 1: N Male
- Connector 2: N Female
- Cable Type: RG58

**Features**

- 50 Ohm RF (Radio Frequency) Transmission
- RG58 stranded center conductor enhances flexibility
- Same day shipping available
- Heat shrink strain relief for a highly durable RF cable assembly

**Applications**

- RFID systems up to 1 GHz
- General Purpose Test and Measurements
- Wireless Infrastructure
- GPS Timing and telematics

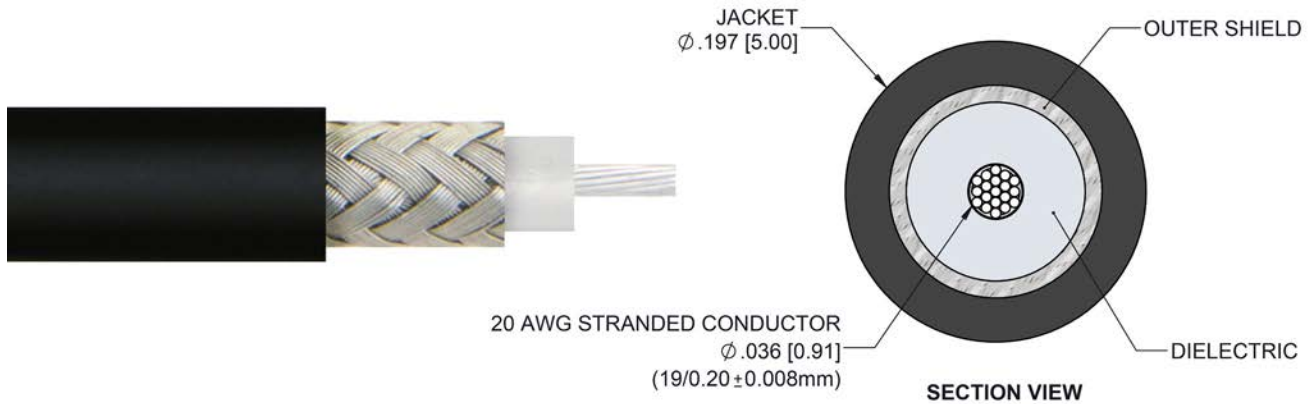

**Description**

L-com's LCCA30671-FT6 is a N male to N female cable assembly using RG58 coax, 6 FT and ships same-day. The RG58 coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to N cable assembly has a male to female gender configuration with flexible RG58 series coax and operates to 1 GHz. The shielding of this N cable is comprised of tinned copper braid.

Custom versions of this N male to N female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30671-FT6 L-com N Male to N Female Cable Assembly using RG58 Coax, 6 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	

N Male to N Female Cable Assembly using RG58 Coax, 6 FT



## LCCA30671-FT6

Velocity of Propagation	69.5	%
Capacitance	16.1 [52.82]	pF/ft [pF/m]

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	200	400	1,000	MHz
Insertion Loss (Typ.)	0.4	0.5	0.63	0.88	1.5	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length 72 in [182.88 cm]

#### Cable

Cable Type RG58  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Tinned Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.197 in [5 mm]  
 Repeated Minimum Bend Radius 2 in [50.8 mm]

N Male to N Female Cable Assembly using RG58 Coax, 6 FT



## LCCA30671-FT6

### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	

### Environmental Specifications

#### Temperature

Operating Range -20 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

N Male to N Female Cable Assembly using RG58 Coax, 6 FT




## LCCA30671-FT6

### How to Order

Part Number Configuration:

**LCCA30671 - xx uu**

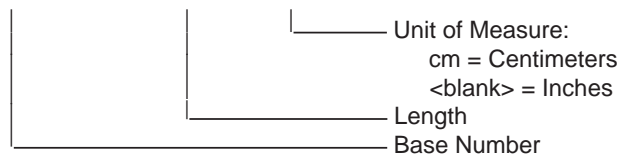

Example: LCCA30671-12 = 12 inches long cable  
LCCA30671-100cm = 100 cm long cable

N Male to N Female Cable Assembly using RG58 Coax, 6 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# N Male to N Female Cable Assembly using RG58 Coax, 6 FT

## L-com CAD Drawing

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	15-09-2020	SELLIS

**WWW.L-COM.COM**  
**L-COM P/N**  
 (SEE NOTE 1)

<p><b>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</b></p> <p><b>TOLERANCES:</b></p> <table style="width: 100%; border: none;"> <tr> <td>.X ± .2 [ .508]</td> <td>FRACTIONS ± 1/32</td> </tr> <tr> <td>.XX ± .02 [ .51]</td> <td>ANGLES ± 1°</td> </tr> <tr> <td>.XXX ± .005 [ .13]</td> <td></td> </tr> </table> <p><b>CABLE LENGTH (L) TOLERANCES:</b></p> <table style="width: 100%; border: none;"> <tr> <td>L ≤ 12 [305]</td> <td>± 1 [25] / -0</td> </tr> <tr> <td>12 [305] &lt; L ≤ 60 [1524]</td> <td>± 2 [61] / -0</td> </tr> <tr> <td>60 [1524] &lt; L ≤ 120 [3048]</td> <td>± 4 [102] / -0</td> </tr> <tr> <td>120 [3048] &lt; L ≤ 300 [7620]</td> <td>± 6 [152] / -0</td> </tr> <tr> <td>300 [7620] &lt; L</td> <td>± 8 [203] / -0</td> </tr> </table>	.X ± .2 [ .508]	FRACTIONS ± 1/32	.XX ± .02 [ .51]	ANGLES ± 1°	.XXX ± .005 [ .13]		L ≤ 12 [305]	± 1 [25] / -0	12 [305] < L ≤ 60 [1524]	± 2 [61] / -0	60 [1524] < L ≤ 120 [3048]	± 4 [102] / -0	120 [3048] < L ≤ 300 [7620]	± 6 [152] / -0	300 [7620] < L	± 8 [203] / -0	<p style="text-align: center;"><b>THIRD-ANGLE PROJECTION</b></p> <p style="text-align: center;"> </p> <p style="font-size: small;">             THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.         </p> <p style="text-align: center;"> <b>SHEET 1 OF 1</b> </p> <p style="text-align: center;"> <b>SCALE N/A</b> </p> <p style="text-align: center;"> <b>REV A</b> </p>
.X ± .2 [ .508]	FRACTIONS ± 1/32																
.XX ± .02 [ .51]	ANGLES ± 1°																
.XXX ± .005 [ .13]																	
L ≤ 12 [305]	± 1 [25] / -0																
12 [305] < L ≤ 60 [1524]	± 2 [61] / -0																
60 [1524] < L ≤ 120 [3048]	± 4 [102] / -0																
120 [3048] < L ≤ 300 [7620]	± 6 [152] / -0																
300 [7620] < L	± 8 [203] / -0																

**NOTES:**

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END, 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.