
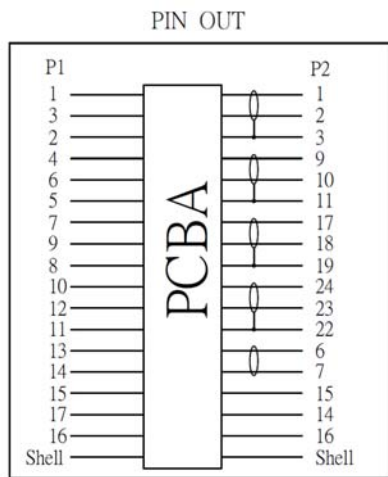


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/2/17	R.CLARK
B	ECN 8970: REVISED DESCRIPTION FROM DVI TO DISPLAYPORT	11/15/17	D.FRISIELLO

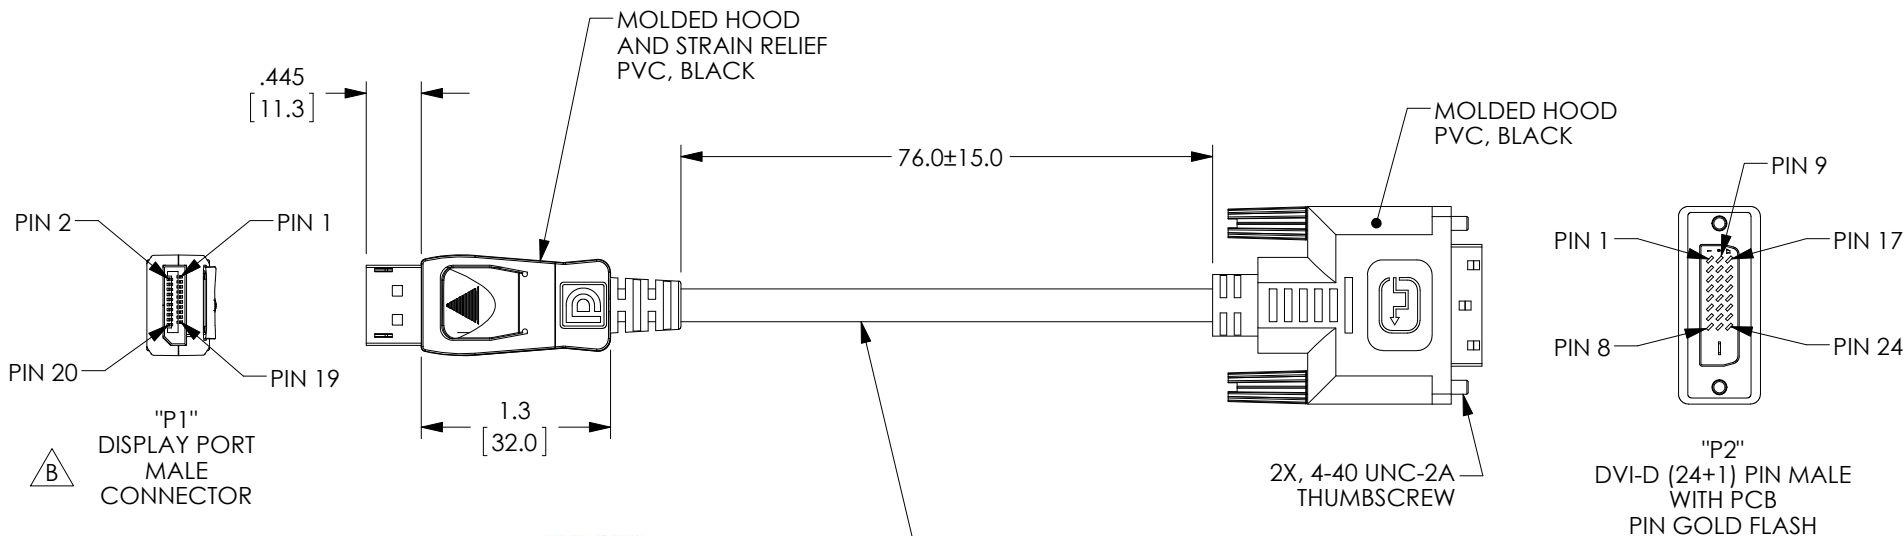

UL 20276: ;  
 (5) INDIVIDUALLY SHIELDED TWISTED PAIR, 30AWG, WITH ALUM/POLY FOIL SHIELD WITH DRAIN WIRE.  
 (1) UNSHIELDED TWISTED PAIR, 30AWG.  
 (3) CONDUCTORS, 30AWG  
 OVERALL ALUM/POLY FOIL SHIELD AND COPPER BRAID SHIELD.  
 JACKET: BLACK

**NOTES:**

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. VOLTAGE TEST: DC 300V 10ms  
 INSULATION RESISTANCE: 10.0 M ohm/MIN.  
 CONDUCTANCE RESISTANCE: 2.0 ohm/MAX.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE 2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY R.CLARK CHECKED BY B.GATES APPROVED BY B.GATES	6/2/17 6/2/17 6/2/17		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	
PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>DPC00003</b>
		SCALE: NONE	CAD FILE: DPC00003.SLDRW	SHEET 1 OF 1