

1710-2700 MHz 8 dBi Gain Omnidirectional PRO Series
Antenna - Type N Female Connector, Fiberglass Radome



HG172708U-PRO

Features

- All weather operation
- Includes heavy duty steel mast mounting brackets
- Lightweight fiberglass radome
- Integral N-Female connector
- Rugged industrial grade design
- 360° Omnidirectional Pattern
- 8 dBi gain

Applications

- 1800, 1900, 2100, 2600 Cellular Band Operation
- Supports midband LTE and 5G networks
- Point to Multipoint and Non Line of Sight (NLOS) Applications

Description

The L-com HG172708U-PRO is a high performance LTE outdoor omnidirectional antenna specifically designed for cellular networks. L-coms HG172708U-PRO has 6 to 8 dBi gain and can be used to broadcast Cellular LTE signals. The HG172708U-PRO operates from 1710 to 2700 MHz which is ideal for 5G, LTE, PCS, UMTS applications including LoRA, LTE-M, and NB-IOT. The Multi-Band design of the L-com HG172708U-PRO antenna eliminates the need to purchase different antennas for each frequency. This simplifies installations since the same antenna can be used for a wide array of telecommunication applications where wide coverage is desired.

The HG172708U-PRO from L-com has omnidirectional patterns with vertical polarization and features Type N connectors. The Type N connectorized HG172708U-PRO antenna from L-com is designed specifically for outdoor operation and is ideal for point to multipoint use in large open areas such as base station installations or large campuses. The included mounting bracket and hardware makes this antenna very easy to install. This LTE outdoor omnidirectional antenna just like our wide selection of superior quality RF parts, ship same day. Contact our knowledgeable and friendly technical support and sales staff for your answers on antennas or other L-com products.

Configuration

| | |
|-------------------|------------------|
| Design | Omni |
| Band Type | Single |
| Radiation Pattern | Omni Directional |
| Polarization | Vertical |
| Connector Type | N Female |
| Number of Ports | 1 |

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | 1,710 | | 2,700 | MHz |
| Input VSWR | | | 2.3:1 | |
| Impedance | | 50 | | Ohms |
| Gain | | 8 | | dBi |
| Input Power | | | 50 | Watts |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[1710-2700 MHz 8 dBi Gain Omnidirectional PRO Series Antenna - Type N Female Connector, Fiberglass Radome HG172708U-PRO](#)

1710-2700 MHz 8 dBi Gain Omnidirectional PRO Series
Antenna - Type N Female Connector, Fiberglass Radome

HG172708U-PRO



Mechanical Specifications

| | |
|------------------------|-------------------------------------|
| Radome Material | Fiberglass |
| Size | |
| Length | 22.6 in [574.04 mm] |
| Width | 1.8 in [45.72 mm] |
| Mounting Mast Diameter | 1.18 to 2.36 in [29.97 to 59.94 mm] |
| Weight | 4.19 lbs [1.9 kg] |

Environmental Specifications

| | |
|--------------------|-------------------------|
| Temperature | |
| Operating Range | -40 to +70 deg C |
| Wind Survivability | 124.27 MPH [199.99 KPH] |
| Humidity | 91 |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

1710-2700 MHz 8 dBi Gain Omnidirectional PRO Series Antenna - Type N Female Connector, Fiberglass Radome from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

1710-2700 MHz 8 dBi Gain Omnidirectional PRO Series Antenna -
Type N Female Connector, Fiberglass Radome

L-com CAD Drawing

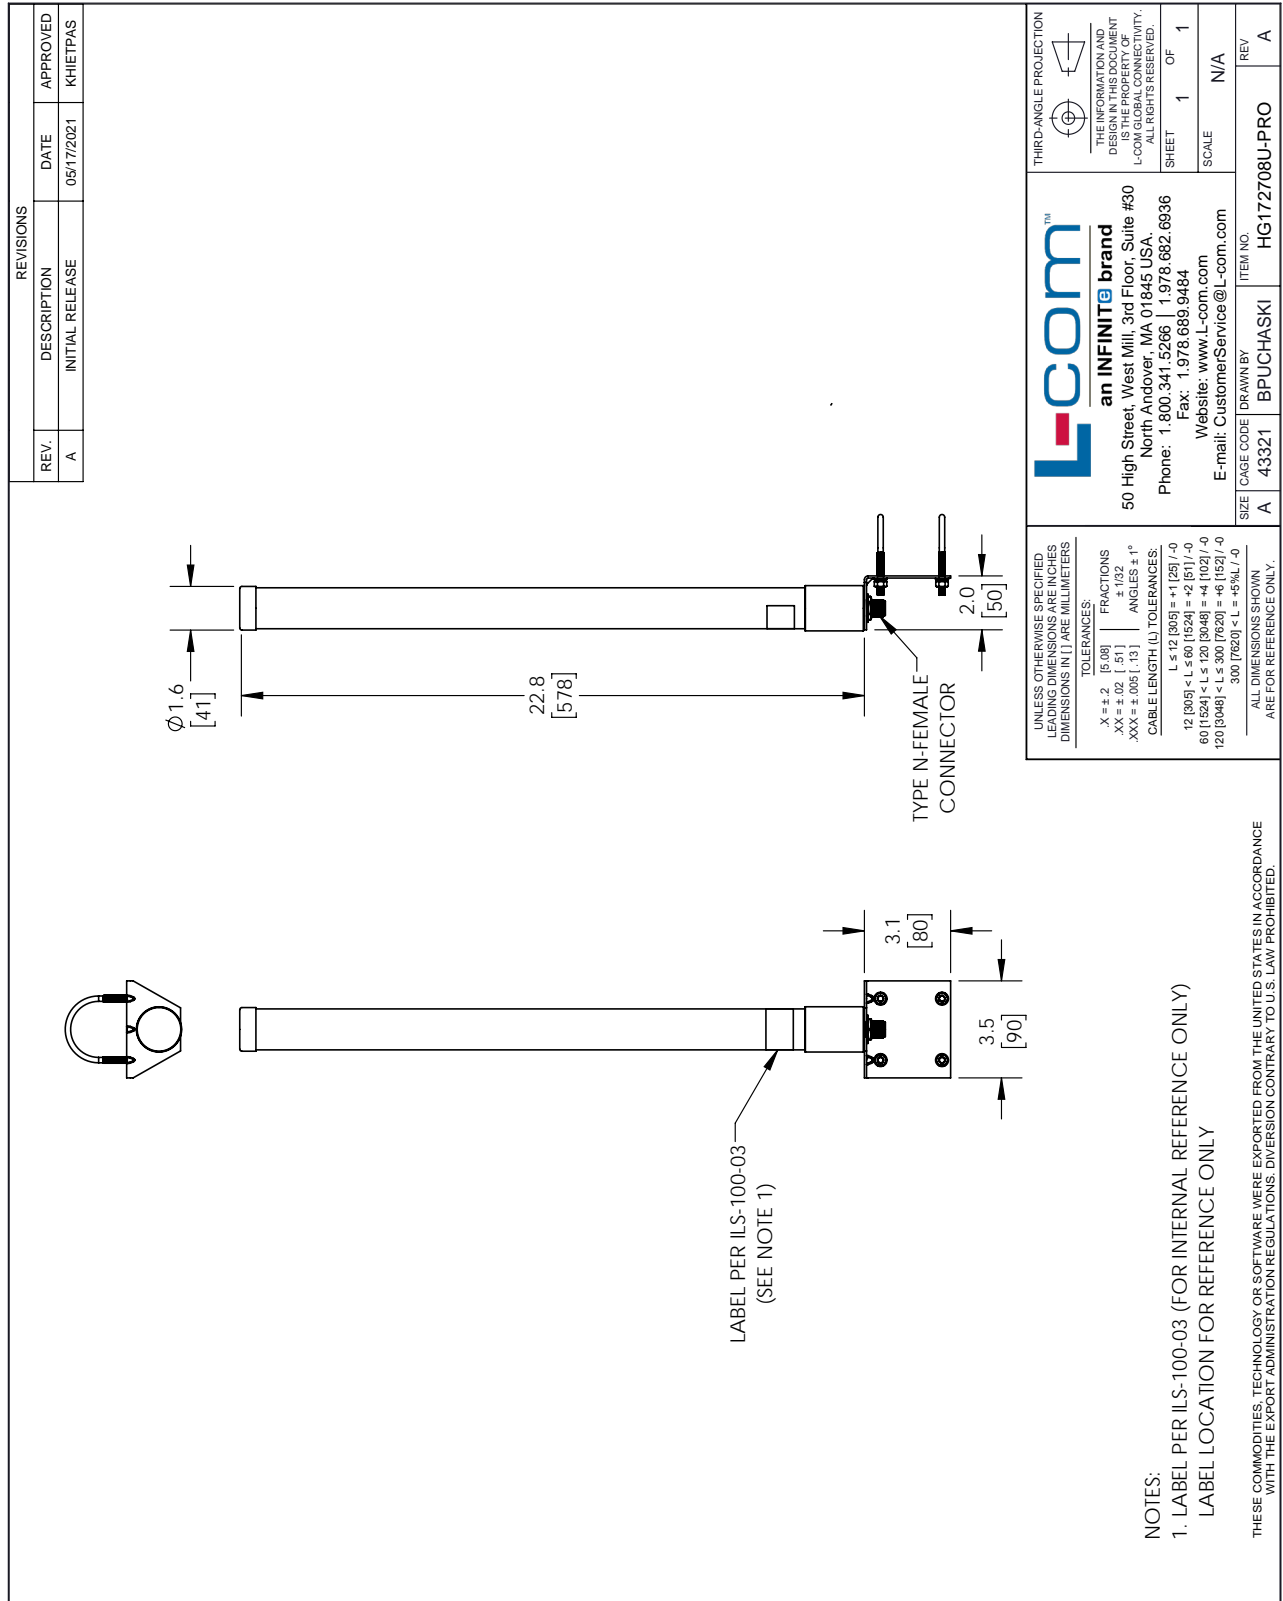

| REVISIONS | | | |
|-----------|-----------------|------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 05/17/2021 | KHIETPAS |

L-com™
an INFINITE brand

50 High Street, West Mill, 3rd Floor, Suite #30
North Andover, MA 01845, USA.
Phone: 1.800.341.5266 | 1.978.682.6936
Fax: 1.978.689.9484
Website: www.L-com.com
E-mail: CustomerService@L-com.com

ITEM NO. HG172708U-PRO

SIZE A CAGE CODE 43321 DRAWN BY BPUCHASKI