


## 14x12x7 Inch Weatherproof Enclosure with (PoE) Power-Over-Ethernet Interface and Solid State Cooling Fan - Model: NB141207-40FS

### Applications

- Remote Wireless LAN WiFi equipment installations
- Indoor and outdoor installations
- Hot temperature environments
- Rapid deployment installations
- Corrosive environments

### Features

- Molded fiberglass reinforced polyester (FRP) industrial enclosure with integral mounting flange
- Stainless steel quick release latches with padlock hasps
- NEMA Type 3R, 3RX / IP24 rated
- Fully gasketed raised Vented lid with removable filters
- Features aluminum mounting plate with Power-Over-Ethernet (PoE) interface with CAT5 surge protection & solid state controlled cooling system

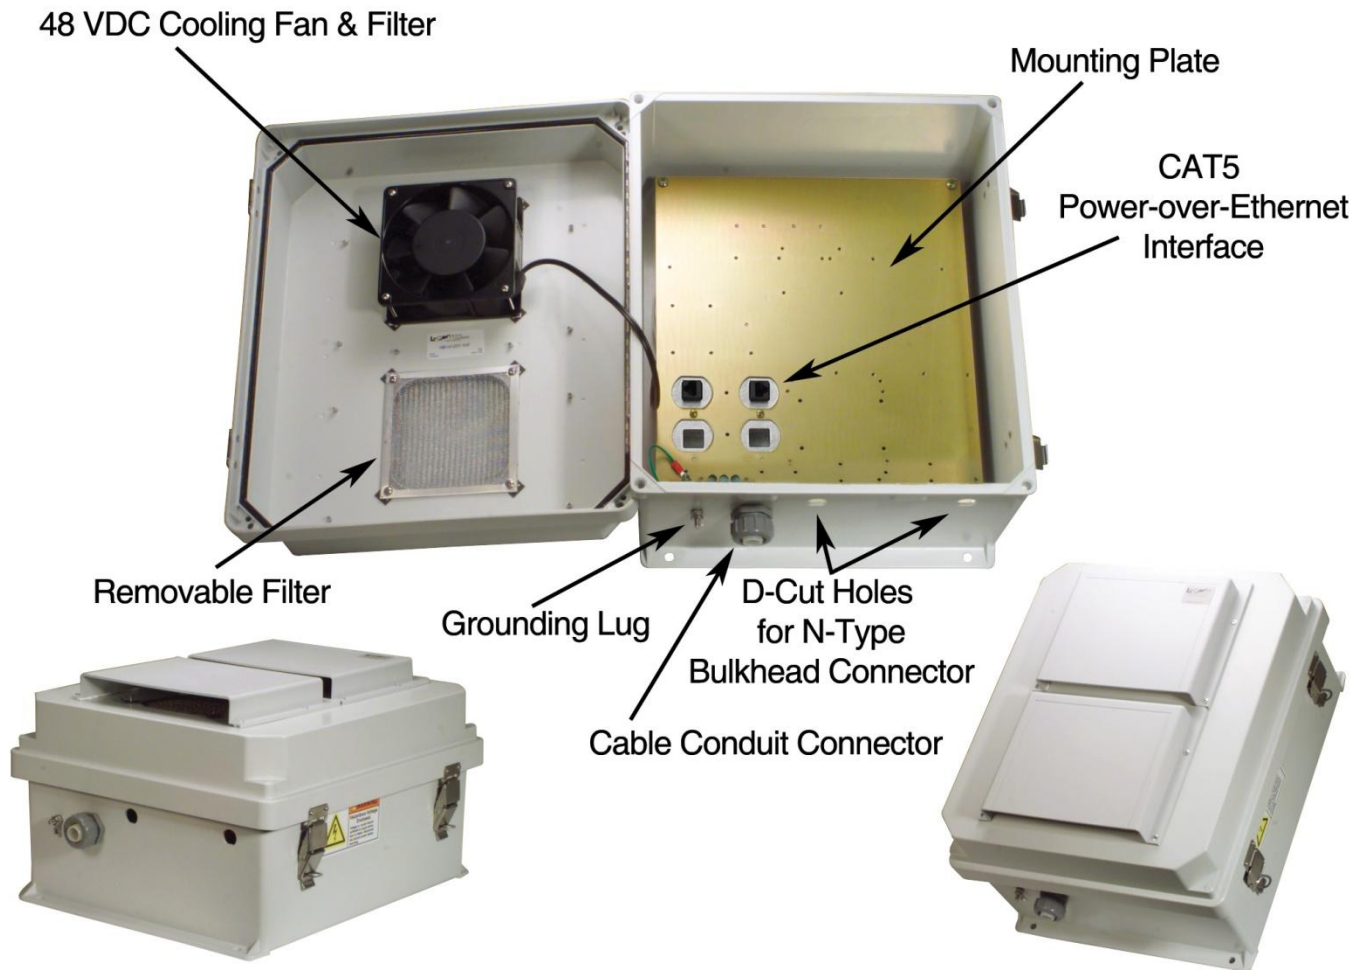

## Description

---

### Start with the Box...

The box is a rugged weatherproof enclosure that is ideal for both indoor and outdoor applications. Constructed from molded fiberglass reinforced polyester, it is well suited for high temperature or corrosive environments. The mounting flange allows it to be wall mounted as well as on a flat surface. The raised lid features a stainless steel continuous hinge and stainless steel quick release latches with padlock hasps. The raised lid is fully gasketed. The enclosure material is UV stabilized and comes in machine tool gray.

### Mounting Plate

The aluminum mounting plate has provisions to mount WLAN equipment from Cisco®, Symbol®, D-Link®, HyperLink and more. With the optional HGX-AMOUNT02 bracket a wide array of HyperLink Amplifiers, Power-Over-Ethernet products and Power Supplies can be mounted as well. Two of these brackets can be mounted side by side. Also available is the HGX-NMOUNT03 Universal Mounting Shelf that can be attached to the mounting plate and can accommodate additional equipment to be placed in the enclosure.

### Power-Over-Ethernet (PoE)

The Mounting Plate features a CAT5 PoE interface that feeds power to the enclosure fan and power plus data to the internal network equipment. The enclosure is not 802.3af PoE compatible. It requires a HyperLink passive PoE injector/Midspan such as the BT-CAT5-P1-4848 to supply power. The interface includes Lightning Protection and support for normal and reverse polarity POE equipment. An optional 802.3af compatible PoE interface with surge protector can be added for a second CAT5 cable.

### Cooling Fan

The NB141207-40FS comes with a high CFM 48 VDC cooling fan installed. The high air flow, low noise fan featuring sealed ball bearings, evacuates heat from the top of the enclosure. The fan is controlled by L-Com's exclusive solid state fan controller. The standard unit has a fan turn-on temperature of +90° F. The controller features improved temperature set point accuracy and can be factory modified for other temperature set points. No extra room for the controller is required since it is mounted underneath the plate.



### Lightning Protection

The PoE interface features built in lightning protection. This helps add an extra level of protection to PoE equipment installed in the enclosure. In addition, the unit can accept up to two optional bulkhead-mount N-Type lightning protectors to protect the coaxial cable runs. An additional PoE interface can be purchased for use in the enclosure.

**Specifications**

<b>Enclosure Material</b>	Fiberglass Reinforced Polyester
<b>Enclosure Color</b>	Machine Tool Gray
<b>Mounting Plate Material</b>	.10 in. (2.5mm) Thick Anodized Aluminum
<b>Mounting Plate Dimensions</b>	12.7 x 10.8 in. (32.2 x 27.4 cm)
<b>Weight</b>	12.3 lbs (5.6 kg)
<b>Outside Dimensions H x W x D (max)</b>	15.3 x 13.3 x 8.7 in. (389 x 338 x 221 mm)
<b>Inside Dimensions H x W x D</b>	14.0 x 12.0 x 7.3 in. (356 x 305 x 186 mm)
<b>Flame Rating</b>	UL 94-5V
<b>Cable Feed</b>	1/2 in. Cable Conduit Connector
<b>RoHS Compliant</b>	Yes
<b>Ratings</b>	NEMA Type 3R, 3RX / IP24

<b>Temperature Controller Specification</b>	
<b>Fan Set Point Temperature</b>	+32°C (+90°F)
<b>Hysteresis Window</b>	5°C (9°F)
Contact us for custom fan set points	

**Application Diagram**

