

6

5

4

3

2

1



NOTES:
ELECTRICAL PROPERTIES:

1. THERE SHOULD BE NO OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. THE CABLE SHALL BE 100% ELECTRICAL TEST.
3. VOLTAGE TEST: DC 300V 10MS;
INSULATION RESISTANCE: 5.0M OHM/MIN
CONDUCTANCE RESISTANCE: 5.0 OHM/MAX.

MACHINERY CHARACTER:

1. ALL DIMENSIONS ARE REFERENCE ONLY
2. THE CABLE SHOULD BE CLEAN, FREE OF OILED/FLASH/BURRED.
3. PACKAGE: INDIVIDUALLY PACKAGED IN A CLEAR POLYBAG.
4. CABLE ASSY SHALL BE RoHS COMPLIANT.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	UPDATED PER ECO-13458	03/01/2024	DMAY	JYOU

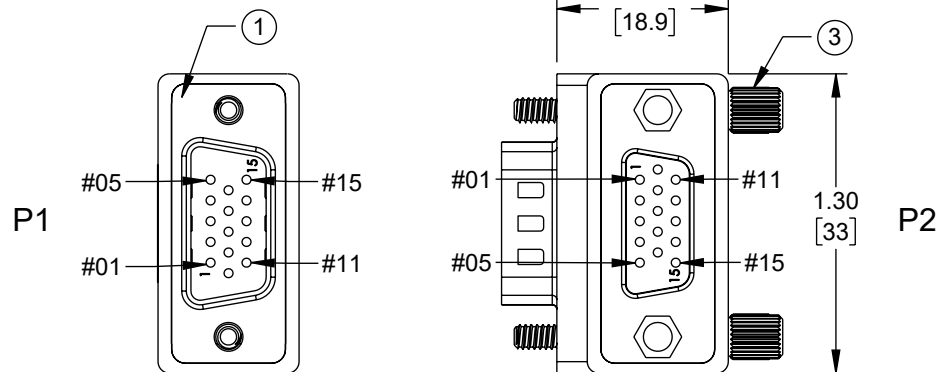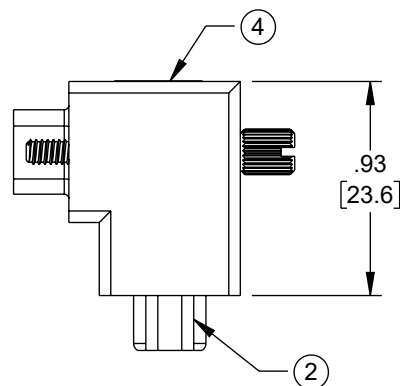

PIN OUT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
S	S

4	OUTER MOLDED: 45P PVC, COLOR: BLACK.	G	10
3	SCREW: 3.0*37.0MM(#4-40UNC), NICKEL PLATED.	PCS	2
2	P2 CONN: HDB15P, FEMALE, WITH FRONT SCREW, INSULATION BLUE, SHELL & PIN GOLD FLASH.	PCS	1
1	P1 CONN: HDB15P, MALE, INSULATION BLUE, SHELL & PIN GOLD FLASH.	PCS	1
ITEM	DESCRIPTION	UNIT	QTY

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
 .X = ±.2 [5] FRACTIONS
 .XX = ±.02 [0.5] ± 1/32
 .XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤ 60 [1524] = +2 [51] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com
an INFINIT® brand

Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE: NONE SHEET: 1 OF 1

DESCRIPTION

HDB15-F-M R/A ADP

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	JYOU	VGC00001	B

6

5

4

3

2

1