

Fiber Optic Transceiver Series, SFP, DWDM, LR-2 80KM, OC-48 (2.5Gbps) DDM, MSA Compliant



FXC-SFPDxxLR2OC48MSA

Features

- Operating Data Rates up to 2.67 Gbps
- Distance Range 80KM
- Pluggable SFP Duplex LC Connectors
- Standard and Industrial Operating Temperatures
- Compliant with MSA Specification

Applications

- Telecom (Service Providers)
- Datacom
- Enterprise Networks
- Government
- Fiber to the Home/Business

Description

The L-com FXC-SFPDxxLR2OC48MSA series are SFP transceivers, supporting 2.5G Ethernet data rates. The SFP DWDM series transceivers have DWDM transmitters, with operating wavelengths between 1530.33 nm to 1561.42 nm. The L-com FXC-SFPDxxLR2OC48MSA supports 80KM distance and is compliant with MSA system level specifications. The L-com FXC-SFPDxxLR2OC48MSA series feature digital diagnostics for performance monitoring of the transceivers. The L-com FXC-SFPDxxLR2OC48MSA series are one of thousands of fiber optic connectivity products available from L-com's in-stock inventory and ready to ship. Contact our knowledgeable technical support and sales staff with your questions on fiber optic connectivity or other L-com products.

Configuration

Data Rate	2.5 Gbps
Form Factor	SFP
Connector	LC
Connector Mode	Duplex
Mode	Single Mode
Distance	80 km
Mfg Platform Compatibility	MSA

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Power Supply Voltage	3.15	3.3	3.45	V
Power Supply Current			450	mA
Module Total Power			1.56	W

Optical Specifications

Description	Minimum	Typical	Maximum	Units
TX Center Wavelength*	1530		1562	nm
TX Data Rate		2.5		Gbps
TX Average Output Power	0		5	dBm
TX Extinction Ratio	8.2			dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[FXC-SFPDxxLR2OC48MSA](#)

Fiber Optic Transceiver Series, SFP, DWDM, LR-2 80KM,
OC-48 (2.5Gbps) DDM, MSA Compliant



FXC-SFPDxxLR2OC48MSA

RX Center Wavelength	1530	1562	nm
RX Receiver Sensitivity	-29		dBm
RX Receiver Overload		-9	dBm

*See table below

Fiber Optic Transceiver Series, SFP, DWDM, LR-2 80KM,
OC-48 (2.5Gbps) DDM, MSA Compliant



FXC-SFPDxxLR2OC48MSA

Wavelength Channel No.

Channel	Frequency	Wavelength		Channel	Frequency	Wavelength
xx	THz	nm		xx	THz	nm
20	192.0	1561.41		40	194.0	1545.32
21	192.1	1560.61		41	194.1	1544.53
22	192.2	1559.79		42	194.2	1543.73
23	192.3	1558.98		43	194.3	1542.94
24	192.4	1558.17		44	194.4	1542.14
25	192.5	1557.36		45	194.5	1541.35
26	192.6	1556.55		46	194.6	1540.56
27	192.7	1555.75		47	194.7	1539.77
28	192.8	1554.94		48	194.8	1538.98
29	192.9	1554.13		49	194.9	1538.19
30	193.0	1553.33		50	195.0	1537.4
31	193.1	1552.52		51	195.1	1536.61
32	193.2	1551.72		52	195.2	1535.82
33	193.3	1550.92		53	195.3	1535.04
34	193.4	1550.12		54	195.4	1534.25
35	193.5	1549.32		55	195.5	1533.47
36	193.6	1548.51		56	195.6	1532.68
37	193.7	1547.72		57	195.7	1531.9
38	193.8	1546.92		58	195.8	1531.12
39	193.9	1546.12		59	195.9	1530.33

Fiber Optic Transceiver Series, SFP, DWDM, LR-2 80KM,
OC-48 (2.5Gbps) DDM, MSA Compliant



FXC-SFPDxxLR2OC48MSA

Environmental Specifications

Temperature

Operating Range

-5 to +70 deg C

Storage Range

-40 to +85 deg C

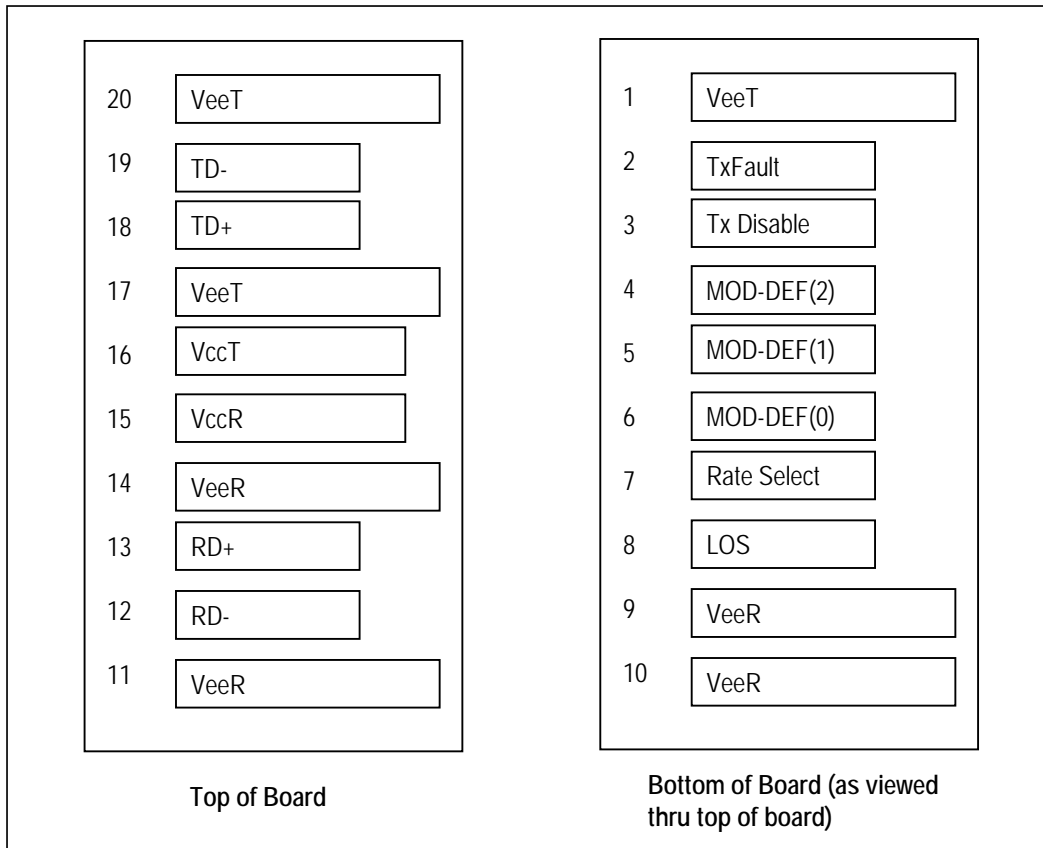
Notes:

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Small Form-factor Pluggable (SFP) Transceiver MultiSource Agreement (MSA)



Fiber Optic Transceiver Series, SFP, DWDM, LR-2 80KM,
OC-48 (2.5Gbps) DDM, MSA Compliant



FXC-SFPDxxLR2OC48MSA

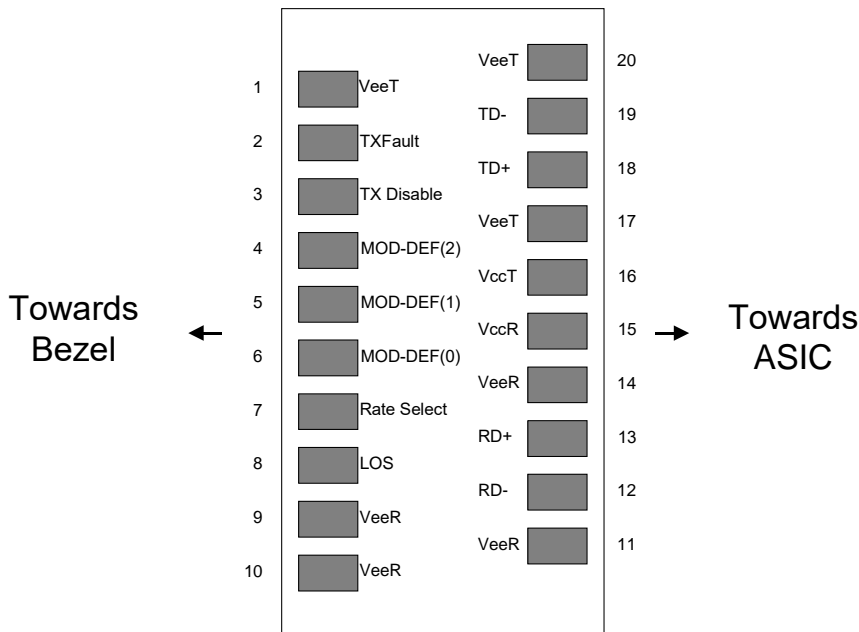



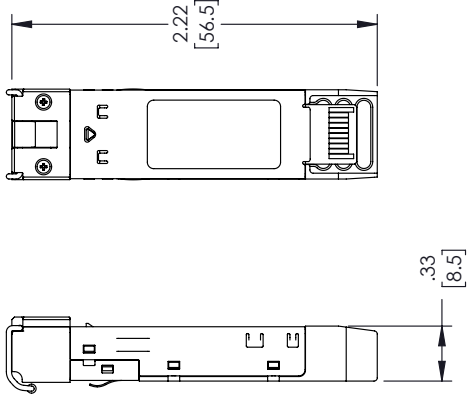

Figure 1. Diagram of Host Board Connector Block Pin Numbers and Names

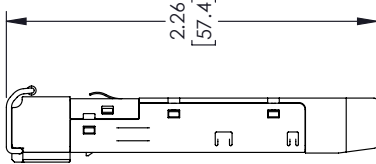
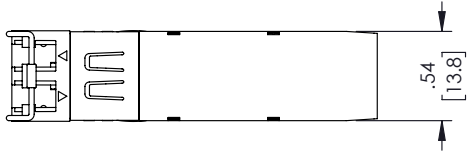
Fiber Optic Transceiver Series, SFP, DWDM, LR-2 80KM, OC-48 (2.5Gbps) DDM, MSA Compliant from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	07/06/2022
		APPROVED PHOSPODAR

NOTES:

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- ITEM NUMBER FXC-SFPDXXLR2OC48 (BOTH FOR 80KM AND 120KM) AND FXC-SFPDXXEXX1G (FOR 120KM) ARE CODED FOR DWDM TRANSCEIVERS. XX REFERS TO DWDM WAVELENGTH CHANNEL 1530.33nm (D59) - 1561.42nm (D20).
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p style="text-align: center;">L-comTM an INFINITE brand</p> <p>50 High Street, West Mill, 3rd Floor, Suite #30 North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 Fax: 1.978.689.9484 E-mail: CustomerService@L-com.com Website: www.L-com.com</p>	<p>THIRD-ANGLE PROJECTION</p>  <p style="font-size: x-small;">THE INFORMATION AND DIMENSIONS SHOWN HEREIN IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>.X = ±.2 [5.08] FRACTIONS ± 1/32</p> <p>.XX = ±.02 [.51] ANGLES ± 1°</p> <p>.XXX = ±.005 [.13]</p> <p>CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] < L ≤ 60 [1524] = +1 [25] / -0</p> <p>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] < L = +5%L / -0</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	<p>SIZE CAGE CODE DRAWN BY ITEM NO. REV</p> <p>A 43321 DZINN FXC-SFPDXX A</p>