

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz,  
BNC-J Connector, Vertical Polarization



## LCANRBD1008

### Features

- 139 MHz to 149 MHz, 1.8 dBi Gain
- BNC connector
- Heliflex whip antenna
- Plug and play
- 20W power handling
- VSWR < 3:1
- Vertical polarization

### Applications

- PtP or PtMP applications
- Trunking for two-way radio comms
- VHF applications
- Public Safety / Emergency services
- Marine / Rail road communications
- P-25 applications exclusively supported
- Land mobile radio (LMR)
- Fixed and mobile services

### Description

The LCANRBD1008 rubber duck antenna from L-Com is part of our extensive line of directional antennas that we offer with global same-day shipping from our facilities certified to ISO 9001:2015. L-Com's high-quality single-band rubber duck antenna has a 1.8 dBi nominal gain and can be procured with no order limit. This rubber duck single-band 1.8 dBi antenna has a frequency range of 139 MHz to 149 MHz.

We lead the industry in supplying products like this 139 MHz to 149 MHz single-band antenna, along with other RF, microwave, and millimeter wave components. This rubber duck antenna from L-Com uses a BNC-J connector and has a maximum input power of 20 watts. Use our single-band rubber duck antenna with vertical polarization for fixed and mobile services, public safety or emergency services, trunking for two-way radio communications, marine or rail road communications, land mobile radio (LMR), PtP or PtMP, and P-25 applications.

L-Com's rubber duck antenna with 1.8 dBi gain has a BNC-J-type connector. This BNC-J-series connectorized omnidirectional antenna is 0.5 inches tall, 0.5 inches wide, and 5.9 inches long. The LCANRBD1008 VHF antenna has 360-degrees of horizontal and 90-degrees of vertical HPBW. Our high-quality antenna has a maximum input VSWR (voltage standing wave ratio) of 3:1.

L-Com's 50 Ohms impedance antenna can operate at temperatures ranging from -40 °C to 60 °C. This single-band rubber duck antenna is offered with expert technical support, PDF datasheets, and CAD drawings with dimensions and specifications. Order your 1.8 dBi VHF rubber duck antennas now and enjoy our international or domestic same-day shipping.

### Configuration

Design	Rubber Duck
Band Type	Single
Radiation Pattern	Omnidirectional
Polarization	Vertical
Connector Type	BNC-J

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	139		149	MHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz, BNC-J Connector, Vertical Polarization LCANRBD1008](#)

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz,  
BNC-J Connector, Vertical Polarization



**LCANRBD1008**


Input VSWR		3:1	
Impedance	50		Ohms
Gain	1.8		dBi
Horizontal (Azimuth) HPBW	Omnidirectional		
Vertical (Elevation) HPBW	90		Degrees
Input Power		20	Watts

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz,  
BNC-J Connector, Vertical Polarization

**LCANRBD1008**



VSWR plot:

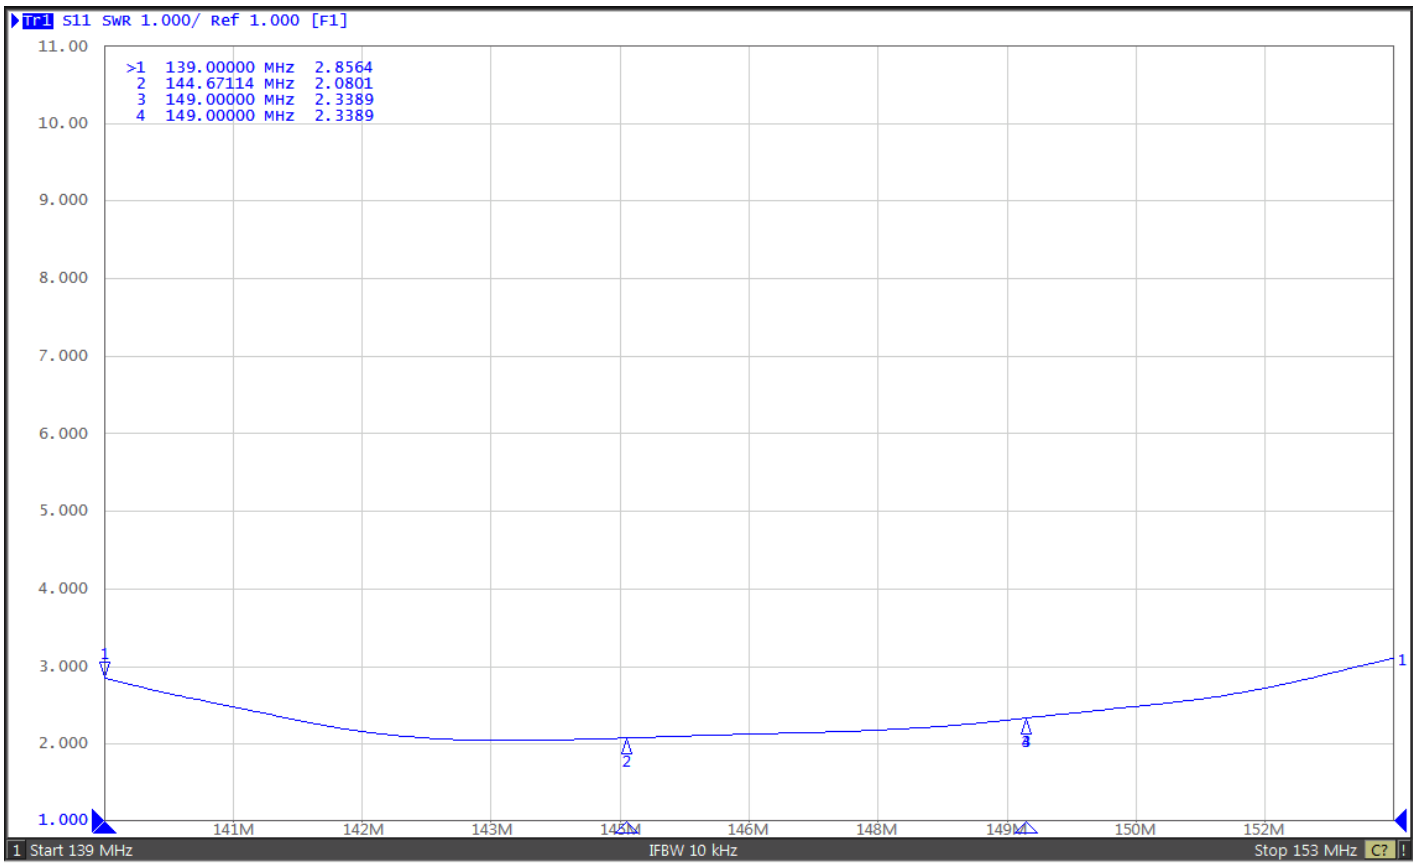

**Mechanical Specifications**

Radome Material	PE
<b>Size</b>	
Length	6.49606 in [165 mm]
Width	0.5 in [12.7 mm]
Height	0.5 in [12.7 mm]
Weight	0.048 lbs [21.77 g]

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz,  
BNC-J Connector, Vertical Polarization



## LCANRBD1008

---

### Environmental Specifications

#### Temperature

Operating Range -40 to +60 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz, BNC-J Connector, Vertical Polarization from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

