



LCCA30111-FT5

Configuration

Connector 1: SMA MaleConnector 2: SMA MaleCable Type: LC085TB


Features

- Max Frequency 18 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.5% VoP

Applications

- · General Purpose
- · Laboratory Use

- Hand Formable
- Tin Filled Copper Composite Braid Outer Conductor
- · System Interconnect

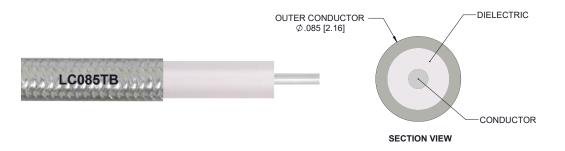

Description

L-com's LCCA30111-FT5 is a SMA male to SMA male cable assembly using LC085TB coax, 5 FT and ships same-day. The LC085TB coax of this SMA cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com SMA to SMA cable assembly has a male to male gender configuration with formable LC085TB series coax and operates to 18 GHz. The tinned copper composite braid outer conductor is easily formed by hand with an overall diameter of 0.085 inches and excellent shielding effectiveness greater than 100dB.

Custom versions of this SMA male to SMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30111-FT5 L-com SMA Male to SMA Male Cable Assembly using LC085TB Coax, 5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.





LCCA30111-FT5

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Con	ductor	65.7 [215.55]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Cor	nductor	10.2 [33.46]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	1.33	1.73	2.75	4	5.81	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length 60 in [152.4 cm]
Diameter 0.013 in [0.33 mm]

Cable

Cable TypeLC085TBImpedance50 OhmsInner Conductor TypeSolid

Inner Conductor Material and Plating Copper Clad Steel, Silver Dielectric Type PTFE

Dielectric Type PTI
Number of Shields 0

Outer Conductor Material and Plating Tinned Copper Composite Braid

Outer Conductor Diameter 0.085 in [2.16 mm]

Repeated Minimum Bend Radius 0.78 in [19.81 mm]





LCCA30111-FT5

Connectors

Description	Connector 1	Connector 2	
Туре	SMA Male	SMA Male	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel	
Dielectric Type	PTFE	PTFE	
Body Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel	
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Hex Size	5/16 inch	5/16 inch	
Torque	10 in-lbs 1.13 Nm	10 in-lbs 1.13 Nm	

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


• Values at 25°C, sea level.





LCCA30111-FT5

How to Order



Example: LCCA30111-12 = 12 inches long cable

LCCA30111-100cm = 100 cm long cable

SMA Male to SMA Male Cable Assembly using LC085TB Coax, 5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

