

N Male to N Female Cable Assembly using LC085TB Coax, 2 FT



**LCCA30120-FT2**

**Configuration**

- Connector 1: N Male
- Connector 2: N Female
- Cable Type: LC085TB

**Features**

- Max Frequency 11 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.5% VoP
- Hand Formable
- Tin Filled Copper Composite Braid Outer Conductor

**Applications**

- General Purpose
- Laboratory Use
- System Interconnect



**Description**

L-com's LCCA30120-FT2 is a N male to N female cable assembly using LC085TB coax, 2 FT and ships same-day. The LC085TB coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com N to N cable assembly has a male to female gender configuration with formable LC085TB series coax and operates to 11 GHz. The tinned copper composite braid outer conductor is easily formed by hand with an overall diameter of 0.085 inches and excellent shielding effectiveness greater than 100dB.

Custom versions of this N male to N female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30120-FT2 L-com N Male to N Female Cable Assembly using LC085TB Coax, 2 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

N Male to N Female Cable Assembly using LC085TB Coax, 2 FT



## LCCA30120-FT2

### Electrical Specifications

| Description                   | Minimum | Typical       | Maximum | Units                 |
|-------------------------------|---------|---------------|---------|-----------------------|
| Frequency Range               | DC      |               | 11      | GHz                   |
| Velocity of Propagation       |         | 69.5          |         | %                     |
| RF Shielding                  | 100     |               |         | dB                    |
| Capacitance                   |         | 29.4 [96.46]  |         | pF/ft [pF/m]          |
| DC Resistance Inner Conductor |         | 65.7 [215.55] |         | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor |         | 10.2 [33.46]  |         | Ohms/1000ft [Ohms/Km] |

### Specifications by Frequency

| Description           | F1  | F2   | F3  | F4  | F5   | Units |
|-----------------------|-----|------|-----|-----|------|-------|
| Frequency             | 0.5 | 1    | 2.5 | 5   | 11   | GHz   |
| Insertion Loss (Max.) | 0.5 | 0.65 | 0.9 | 1.3 | 1.91 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

|          |                    |
|----------|--------------------|
| Length   | 24 in [609.6 mm]   |
| Diameter | 0.013 in [0.33 mm] |

#### Cable

|                                      |                               |
|--------------------------------------|-------------------------------|
| Cable Type                           | LC085TB                       |
| Impedance                            | 50 Ohms                       |
| Inner Conductor Type                 | Solid                         |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver     |
| Dielectric Type                      | PTFE                          |
| Number of Shields                    | 0                             |
| Outer Conductor Material and Plating | Tinned Copper Composite Braid |
| Outer Conductor Diameter             | 0.085 in [2.16 mm]            |
| Repeated Minimum Bend Radius         | 0.78 in [19.81 mm]            |

N Male to N Female Cable Assembly using LC085TB Coax, 2 FT



## LCCA30120-FT2

### Connectors

| Description                          | Connector 1             | Connector 2           |
|--------------------------------------|-------------------------|-----------------------|
| Type                                 | N Male                  | N Female              |
| Impedance                            | 50 Ohms                 | 50 Ohms               |
| Contact Material and Plating         | Brass, Gold over Nickel | Phosphor Bronze, Gold |
| Dielectric Type                      | PTFE                    | PTFE                  |
| Outer Conductor Material and Plating |                         | Brass, Nickel         |
| Body Material and Plating            | Brass, Nickel           | Brass, Nickel         |
| Coupling Nut Material and Plating    | Brass, Nickel           |                       |

### Environmental Specifications

#### Temperature

Operating Range -55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

N Male to N Female Cable Assembly using LC085TB Coax, 2 FT




## LCCA30120-FT2

### How to Order

Part Number Configuration:

**LCCA30120 - xx uu**

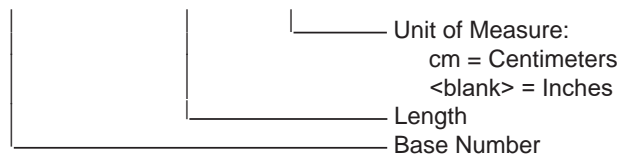

Example: LCCA30120-12 = 12 inches long cable  
LCCA30120-100cm = 100 cm long cable

N Male to N Female Cable Assembly using LC085TB Coax, 2 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# N Male to N Female Cable Assembly using LC085TB Coax, 2 FT

## L-com CAD Drawing

| REVISIONS |                 |            |          |
|-----------|-----------------|------------|----------|
| REV.      | DESCRIPTION     | DATE       | APPROVED |
| A         | INITIAL RELEASE | 01/31/2020 | SELLIS   |

LENGTH MEASURED FROM CONTACT TO CONTACT

LC085TB FORMABLE CABLE

N MALE

N FEMALE

WWW.L-COM.COM  
L-COM P/N  
(SEE NOTE 1)

LABEL

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

**L-com**  
an INFINITE brand

50 High Street, West Mill, 3rd Floor, Suite #30  
North Andover, MA 01845 USA.  
Phone: 1.800.341.5266 | 1.978.682.6936  
Fax: 1.978.689.9484  
Website: www.l-com.com  
E-mail: CustomerService@l-com.com

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

**TOLERANCES:**

|             |        |                               |                |
|-------------|--------|-------------------------------|----------------|
| .X ± .2     | [5.08] | FRACTIONS                     | ± 1/32         |
| .XX ± .02   | [.51]  | ANGLES ± 1°                   |                |
| .XXX ± .005 | [.13]  | CABLE LENGTHS (L) TOLERANCES: |                |
|             |        | L ≤ 12 [305]                  | ± 1 [25] / -0  |
|             |        | 12 [305] < L ≤ 60 [1524]      | ± 2 [61] / -0  |
|             |        | 60 [1524] < L ≤ 120 [3048]    | ± 4 [102] / -0 |
|             |        | 120 [3048] < L ≤ 300 [7620]   | ± 6 [152] / -0 |
|             |        | 300 [7620] < L                | ± 8% L / -0    |

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE A CAGE CODE DRAWN BY PART NUMBER  
A 43321 MVEERAPPAN LCCA30120

**NOTES:**

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END, 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev D