

SMA Male Right Angle to SMA Female Cable
Assembly using RG223 Coax, 5 FT



LCCA30369-FT5

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female
- Cable Type: RG223

Features

- Max Frequency 12.4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications

- General Purpose
- Laboratory Use



Description

L-com's LCCA30369-FT5 is a SMA male right angle to SMA female cable assembly using RG223 coax, 5 FT and ships same-day. The RG223 coax of this SMA cable uses the PE dielectric with a VoP of 66%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com SMA to SMA cable assembly has a male to female gender configuration with flexible RG223 series coax and operates to 12.4 GHz. The double shield of this SMA cable is layered by silver plated copper braid over silver plated copper braid. This right angle SMA cable interface on the RG223 coax allows for easier connections in tight spaces.

Custom versions of this SMA male to SMA female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30369-FT5 L-com SMA Male Right Angle to SMA Female Cable Assembly using RG223 Coax, 5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

SMA Male Right Angle to SMA Female Cable
Assembly using RG223 Coax, 5 FT



LCCA30369-FT5

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------------|---------|--------------|
| Frequency Range | DC | | 12.4 | GHz |
| VSWR | | | 1.5:1 | |
| Velocity of Propagation | | 66 | | % |
| Capacitance | | 30.8 [101.05] | | pF/ft [pF/m] |
| Operating Voltage (AC) | | | 500 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-----|----|-----|----|------|-------|
| Frequency | 0.5 | 1 | 2.5 | 5 | 11 | GHz |
| Insertion Loss (Typ.) | 0.8 | 1 | 1.3 | 2 | 3.05 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in the assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

| | |
|----------|---------------------|
| Length | 60 in [152.4 cm] |
| Diameter | 0.315 in [8 mm] |
| Weight | 0.062 lbs [28.12 g] |

Cable

| | |
|--------------------------------------|----------------------------|
| Cable Type | RG223 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper, Silver |
| Dielectric Type | PE |
| Number of Shields | 2 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Shield Layer 2 | Silver Plated Copper Braid |
| Jacket Material | PVC, Black |
| Jacket Diameter | 0.209 in [5.31 mm] |

| | |
|------------------------------|---------------------|
| One Time Minimum Bend Radius | 0.984 in [24.99 mm] |
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |

SMA Male Right Angle to SMA Female Cable
Assembly using RG223 Coax, 5 FT



LCCA30369-FT5

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|----------------------|------------------------|
| Type | SMA Male Right Angle | SMA Female |
| Specification | MIL-STD-348A | |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Beryllium Copper, Gold |
| Contact Plating Specification | 50µ in. minimum | 50µ in. minimum. |
| Dielectric Type | Teflon | PTFE |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum | 100µ in. minimum. |
| Coupling Nut Material and Plating | Brass, Nickel | |
| Coupling Nut Plating Specification | 100µ in. minimum | |
| Hex Size | 5/16 in | |
| Torque | 3 in-lbs 0.34 Nm | |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male Right Angle to SMA Female Cable
Assembly using RG223 Coax, 5 FT




LCCA30369-FT5

How to Order

Part Number Configuration:

LCCA30369 - xx uu

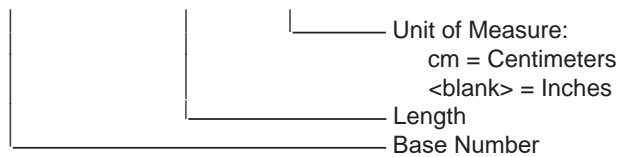

Example: LCCA30369-12 = 12 inches long cable
LCCA30369-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Cable Assembly using RG223 Coax, 5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

SMA Male Right Angle to SMA Female Cable Assembly using RG223 Coax, 5 FT

L-com CAD Drawing

| REVISIONS | | DATE | APPROVED |
|-----------|--------------------------------|------------|----------|
| REV. A | DESCRIPTION INITIAL RELEASE | 06/10/2020 | SELLIS |

LENGTH MEASURED FROM CONTACT TO CONTACT

SMA MALE RIGHT ANGLE

SMA FEMALE

WWW.L-COM.COM
L-COM P/N
(SEE NOTE 1)

5/16" HEX

5/16" HEX

2X HEAT SHRINK SLEEVE

RG223

LABEL

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

ITEM NO. LCCA30369

DRAWN BY BPUCHASKI

CAGE CODE A 43321

E-mail: CustomerService@L-com.com

Website: www.L-com.com

Fax: 1.978.689.9484

Phone: 1.800.341.5266 | 1.978.682.6936

North Andover, MA 01845 USA.

an INFINITE brand

L-com™

50 High Street, West Mill, 3rd Floor, Suite #30

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] | FRACTIONS ± 1/32

.XX = ±.02 [.51] | ANGLES ± 1°

.XXX = ±.005 [.13] | CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = ±.1 [25] / -0

12 [305] < L ≤ 60 [1524] = -.2 [51] / -0

60 [1524] < L ≤ 120 [3048] = -.4 [102] / -0

120 [3048] < L ≤ 300 [7620] = -.6 [152] / -0

300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

NOTES:

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE END OF THE CONNECTOR.