

BNC Female Bulkhead to SMA Female Cable  
Assembly using LC141TB Coax, 2 FT



**LCCA30405-FT2**

**Configuration**

- Connector 1: BNC Female Bulkhead
- Connector 2: SMA Female
- Cable Type: LC141TB

**Features**

- Max Frequency 1 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.9% VoP
- Hand Formable
- Tin Filled Copper Braid Outer Conductor

**Applications**

- General Purpose
- Laboratory Use
- System Interconnect



**Description**

L-com's LCCA30405-FT2 is a BNC female bulkhead to SMA female cable assembly using LC141TB coax, 2 FT and ships same-day. The LC141TB coax of this BNC cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com BNC to SMA cable assembly has a female to female gender configuration with formable LC141TB series coax and operates to 1 GHz. The tinned copper braid outer conductor is easily formed by hand with an overall diameter of inches and excellent shielding effectiveness greater than 110dB. L-com's RF cable assembly with BNC bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications.

Custom versions of this BNC female to BNC female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30405-FT2 L-com BNC Female Bulkhead to SMA Female Cable Assembly using LC141TB Coax, 2 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

BNC Female Bulkhead to SMA Female Cable  
Assembly using LC141TB Coax, 2 FT



## LCCA30405-FT2

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.45:1	
Velocity of Propagation		69.5		%
RF Shielding	110			dB
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		7.8 [25.59]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		5.5 [18.04]		Ohms/1000ft [Ohms/Km]

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	500	1,000				MHz
Insertion Loss (Max.)	0.36	0.44				dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length 24 in [609.6 mm]

#### Cable

Cable Type LC141TB  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Outer Conductor Material and Plating Tinned Copper Braid  
 Repeated Minimum Bend Radius 0.625 in [15.88 mm]

BNC Female Bulkhead to SMA Female Cable  
Assembly using LC141TB Coax, 2 FT



## LCCA30405-FT2

### Connectors

Description	Connector 1	Connector 2
Type	BNC Female Bulkhead	SMA Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating		Beryllium Copper, Gold over Nickel
Dielectric Type		PTFE
Body Material and Plating	Brass, Nickel	Brass, Gold over Nickel

### Environmental Specifications

#### Temperature

Operating Range -55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

BNC Female Bulkhead to SMA Female Cable  
Assembly using LC141TB Coax, 2 FT




## LCCA30405-FT2

### How to Order

Part Number Configuration:

**LCCA30405 - xx uu**

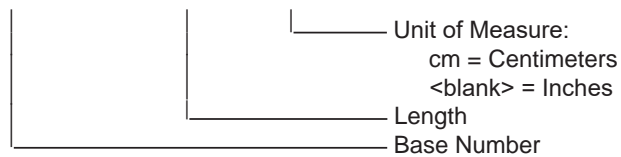

Example: LCCA30405-12 = 12 inches long cable  
LCCA30405-100cm = 100 cm long cable

BNC Female Bulkhead to SMA Female Cable Assembly using LC141TB Coax, 2 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# BNC Female Bulkhead to SMA Female Cable Assembly using LC141TB Coax, 2 FT

## L-com CAD Drawing

REVISIONS		DATE	APPROVED
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/21/20	SELLIS

LENGTH MEASURED FROM CONTACT TO FLANGE

SMA FEMALE

BNC FEMALE BULKHEAD

MOUNTING HOLE

SEE NOTE 1

WWW.L-COM.COM  
L-COM P/N

SOLDER

LC141TB

MAX PANEL

SOLDER

7/16 HEX

11/16 HEX

5/8 HEX

1/4 HEX

.80 [20.4]

.23 [5.7]

.472<sup>+0.008</sup><sub>-.000</sub>

[11.99 +0.20/0.00]

Ø .504<sup>+0.008</sup><sub>-.000</sub>

[12.80 +0.20/0.00]

TOLERANCES:

X = ±.2 [5.08]    FRACTIONS ±1/32

.XX = ±.02 [.51]    ANGLES ± 1°

.XXX = ±.005 [.13]

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = ±1 [25] / -0

12 [305] < L ≤ 60 [1524] = ±2 [51] / -0

60 [1524] < L ≤ 120 [3048] = ±4 [102] / -0

120 [3048] < L ≤ 300 [7620] = +6 [152] / -0

300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

ITEM NO. LCCA30405

DRAWN BY DZINN

CAGE CODE A 43321

E-mail: CustomerService@L-com.com

Website: www.L-com.com

Fax: 1.978.689.9484

Phone: 1.800.341.5266 | 1.978.682.6936

North Andover, MA 01845 USA.

Suite #30

West Mill, 3rd Floor

an INFINITE brand

L-com

### NOTES:

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev D