

#### LCCA30515-FT1

## Configuration

- Connector 1: N Male Right AngleConnector 2: TNC Male Right Angle
- Cable Type: LC141TBJ


#### **Features**

- · Max Frequency 6 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 70.0% VoP

## **Applications**

- · General Purpose
- Laboratory Use

- Hand Formable
- Tin Filled Copper Braid Outer Conductor
- FEP Jacket
- · System Interconnect

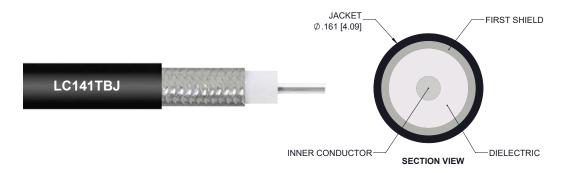

### **Description**

L-com's LCCA30515-FT1 is a N male right angle to TNC male right angle cable assembly using LC141TBJ coax, 1 FT and ships same-day. The LC141TBJ coax of this N cable uses the PTFE dielectric with a VoP of 70%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com N to TNC cable assembly has a male to male gender configuration with formable LC141TBJ series coax and operates to 6 GHz. The jacketed tinned copper braid outer conductor is easily formed by hand with an overall diameter of 0.161 inches and excellent shielding effectiveness greater than 100dB. This right angle N and TNC cable interface on the LC141TBJ coax allows for easier connections in tight spaces.

Custom versions of this N male to N male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30515-FT1 L-com N Male Right Angle to TNC Male Right Angle Cable Assembly using LC141TBJ Coax, 1 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.





#### LCCA30515-FT1

# **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.45:1	
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Con	ductor	7.28 [23.88]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Cor	nductor	5.5 [18.04]		Ohms/1000ft [Ohms/Km]

# **Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	6		GHz
Insertion Loss (Typ.)	0.29	0.33	0.39	0.55		dB

#### **Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2 dB per connector.

## **Mechanical Specifications**

## **Cable Assembly**

Length 12 in [304.8 mm]
Diameter 0.79 in [20.07 mm]

# Cable

Cable TypeLC141TBJImpedance50 OhmsInner Conductor TypeSolidInner Conductor Material and PlatingCopper, Silver

Dielectric Type

Outer Conductor Material and Plating

Tinned Copper Braid

Jacket Material FEP, Black
Jacket Diameter 0.161 in [4.09 mm]

One Time Minimum Bend Radius 0.315 in [8 mm]
Repeated Minimum Bend Radius 1.575 in [40.01 mm]





# LCCA30515-FT1

## **Connectors**

Connector 1	Connector 2		
N Male Right Angle	TNC Male Right Angle		
50 Ohms	50 Ohms		
Brass, Gold over Nickel	Brass, Gold over Nickel		
PTFE	PTFE		
Brass, Nickel	Brass, Nickel		
Brass, Nickel	Brass, Nickel		
	N Male Right Angle 50 Ohms Brass, Gold over Nickel PTFE Brass, Nickel		

**Environmental Specifications** 

Temperature

Operating Range -65 to +150 deg C

Compliance Certifications (see product page for current document)

**Plotted and Other Data** 


Notes:





#### LCCA30515-FT1

#### **How to Order**



Example: LCCA30515-12 = 12 inches long cable LCCA30515-100cm = 100 cm long cable

N Male Right Angle to TNC Male Right Angle Cable Assembly using LC141TBJ Coax, 1 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to instock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# **L-com CAD Drawing**

