

N Female to TNC Male Right Angle Cable  
Assembly using LC085TB Coax, 10 FT



**LCCA30585-FT10**

**Configuration**

- Connector 1: N Female
- Connector 2: TNC Male Right Angle
- Cable Type: LC085TB

**Features**

- Max Frequency 6 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.5% VoP
- Hand Formable
- Tin Filled Copper Composite Braid Outer Conductor

**Applications**

- General Purpose
- Laboratory Use
- System Interconnect



**Description**

L-com's LCCA30585-FT10 is a N female to TNC male right angle cable assembly using LC085TB coax, 10 FT and ships same-day. The LC085TB coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com N to TNC cable assembly has a female to male gender configuration with formable LC085TB series coax and operates to 6 GHz. The tin plated copper outer conductor can be easily formed by hand and has an overall diameter of 0.085 inches. This right angle TNC cable interface on the LC085TB coax allows for easier connections in tight spaces.

Custom versions of this N female to N male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30585-FT10 L-com N Female to TNC Male Right Angle Cable Assembly using LC085TB Coax, 10 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

N Female to TNC Male Right Angle Cable  
Assembly using LC085TB Coax, 10 FT



## LCCA30585-FT10

### Electrical Specifications

| Description                   | Minimum | Typical       | Maximum | Units                 |
|-------------------------------|---------|---------------|---------|-----------------------|
| Frequency Range               | DC      |               | 6       | GHz                   |
| VSWR                          |         |               | 1.45:1  |                       |
| Velocity of Propagation       |         | 69.5          |         | %                     |
| Capacitance                   |         | 29 [95.14]    |         | pF/ft [pF/m]          |
| DC Resistance Inner Conductor |         | 65.7 [215.55] |         | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor |         | 10.2 [33.46]  |         | Ohms/1000ft [Ohms/Km] |

### Specifications by Frequency

| Description           | F1  | F2  | F3  | F4  | F5 | Units |
|-----------------------|-----|-----|-----|-----|----|-------|
| Frequency             | 0.5 | 1   | 2.5 | 6   |    | GHz   |
| Insertion Loss (Typ.) | 1.8 | 2.6 | 3.8 | 6.3 |    | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly.  
The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

### Mechanical Specifications

#### Cable Assembly

|          |                   |
|----------|-------------------|
| Length   | 120 in [304.8 cm] |
| Diameter | 0.63 in [16 mm]   |

#### Cable

|                                      |                           |
|--------------------------------------|---------------------------|
| Cable Type                           | LC085TB                   |
| Impedance                            | 50 Ohms                   |
| Inner Conductor Type                 | Solid                     |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type                      | PTFE                      |
| Number of Shields                    | 1                         |
| Outer Conductor Material and Plating | Copper, Tin               |
| Outer Conductor Diameter             | 0.085 in [2.16 mm]        |
| Repeated Minimum Bend Radius         | 0.78 in [19.81 mm]        |

N Female to TNC Male Right Angle Cable  
Assembly using LC085TB Coax, 10 FT



## LCCA30585-FT10

### Connectors

| Description                       | Connector 1           | Connector 2             |
|-----------------------------------|-----------------------|-------------------------|
| Type                              | N Female              | TNC Male Right Angle    |
| Impedance                         | 50 Ohms               | 50 Ohms                 |
| Contact Material and Plating      | Phosphor Bronze, Gold | Brass, Gold over Nickel |
| Dielectric Type                   | PTFE                  | PTFE                    |
| Body Material and Plating         | Brass, Nickel         | Brass, Nickel           |
| Coupling Nut Material and Plating |                       | Brass, Nickel           |

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

N Female to TNC Male Right Angle Cable Assembly using LC085TB Coax, 10 FT



## LCCA30585-FT10

### How to Order

Part Number Configuration:

**LCCA30585 - xx uu**



Example: LCCA30585-12 = 12 inches long cable  
LCCA30585-100cm = 100 cm long cable

N Female to TNC Male Right Angle Cable Assembly using LC085TB Coax, 10 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.


The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# N Female to TNC Male Right Angle Cable Assembly using LC085TB Coax, 10 FT


## L-com CAD Drawing

| REVISIONS |                 | DATE       | APPROVED |
|-----------|-----------------|------------|----------|
| REV.      | DESCRIPTION     |            |          |
| A         | INITIAL RELEASE | 06/03/2020 | SELLIS   |



N FEMALE

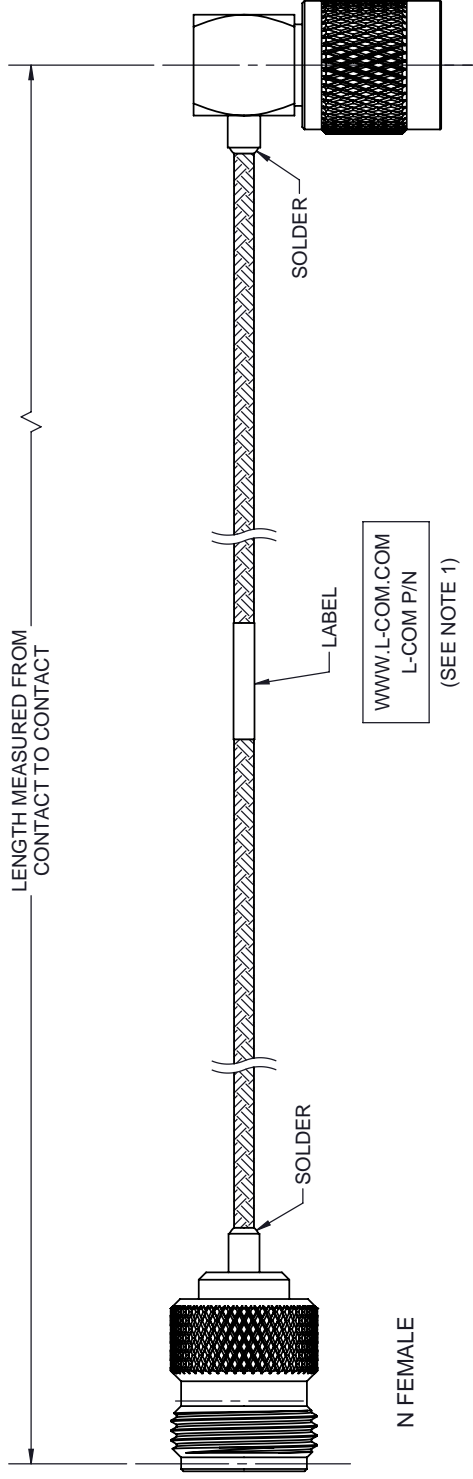


LENGTH MEASURED FROM CONTACT TO CONTACT

SOLDER

WWW.L-COM.COM  
L-COM P/N  
(SEE NOTE 1)

SOLDER

Label

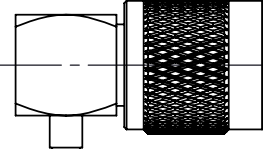

TNC MALE  
RIGHT ANGLE

**NOTES:**

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE END OF THE CONNECTOR.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

**TOLERANCES:**

|             |        |                              |                |
|-------------|--------|------------------------------|----------------|
| .X ± .2     | [5.08] | FRACTIONS                    | ± 1/32         |
| .XX ± .02   | [.51]  | ANGLES ± °                   |                |
| .XXX ± .005 | [.13]  | CABLE LENGTH (L) TOLERANCES: |                |
|             |        | L ≤ 12 [305]                 | ± 1 [25] / -0  |
|             |        | 12 [305] < L ≤ 60 [1524]     | ± 2 [61] / -0  |
|             |        | 60 [1524] < L ≤ 120 [3048]   | ± 4 [102] / -0 |
|             |        | 120 [3048] < L ≤ 300 [7620]  | ± 6 [152] / -0 |
|             |        | 300 [7620] < L ≤ ∞           | ± 9% L / -0    |

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

**L-com™**  
an INFINITE brand

50 High Street, West Mill, 3rd Floor, Suite #30  
North Andover, MA 01845 USA.  
Phone: 1.800.341.5266 | 1.978.682.6936  
Fax: 1.978.689.9484  
Website: www.l-com.com  
E-mail: CustomerService@l-com.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

|      |           |           |           |     |
|------|-----------|-----------|-----------|-----|
| SIZE | CAGE CODE | DRAWN BY  | ITEM NO.  | REV |
| A    | 43321     | BPUCHASKI | LCCA30585 | A   |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev D