

N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT



**LCCA30666-FT6**

**Configuration**


- Connector 1: N Male
- Connector 2: SMA Male Right Angle
- Cable Type: RG58

**Features**

- 50 Ohm RF (Radio Frequency) Transmission
- RG58 stranded center conductor enhances flexibility
- Same day shipping available
- Right angle body style accommodates tight fit applications
- Heat shrink strain relief for a highly durable RF cable assembly

**Applications**

- RFID systems up to 1 GHz
- General Purpose Test and Measurements
- Wireless Infrastructure
- GPS Timing and telematics

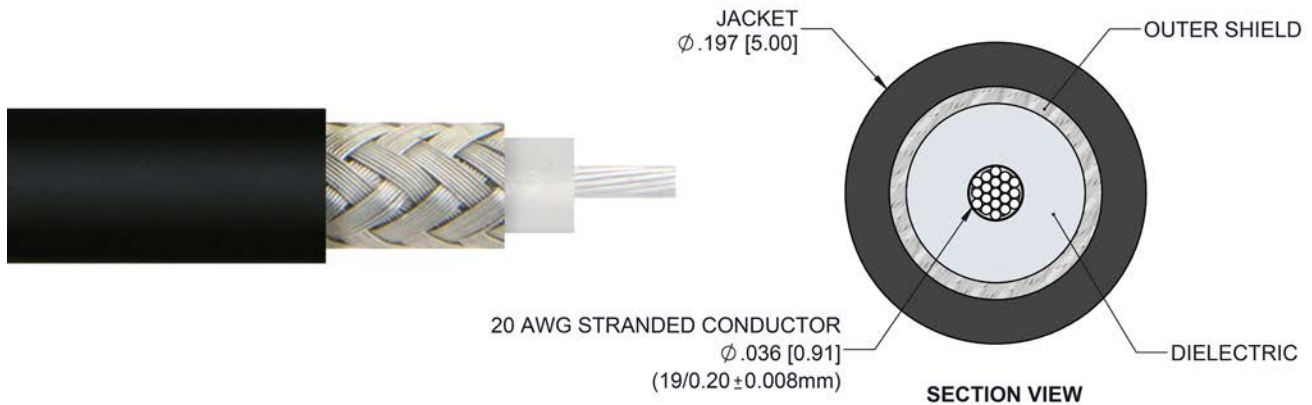

**Description**

L-com's LCCA30666-FT6 is a N male to SMA male right angle cable assembly using RG58 coax, 6 FT and ships same-day. The RG58 coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to SMA cable assembly has a male to male gender configuration with flexible RG58 series coax and operates to 1 GHz. The shielding of this N cable is comprised of tinned copper braid. This right angle SMA cable interface on the RG58 coax allows for easier connections in tight spaces.

Custom versions of this N male to N male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30666-FT6 L-com N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz

N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT



**LCCA30666-FT6**

VSWR		1.4:1	
Velocity of Propagation	69.5		%
Capacitance	16.1 [52.82]		pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	200	400	1,000	MHz
Insertion Loss (Typ.)	0.5	0.6	0.73	1	1.6	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

**Mechanical Specifications**

**Cable Assembly**

Length 72 in [182.88 cm]

**Cable**

Cable Type RG58  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Tinned Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.197 in [5 mm]

Repeated Minimum Bend Radius 2 in [50.8 mm]

N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT



## LCCA30666-FT6

### Connectors

Description	Connector 1	Connector 2
Type	N Male	SMA Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

### Environmental Specifications

#### Temperature

Operating Range -20 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT



**LCCA30666-FT6**

**How to Order**

Part Number Configuration:

**LCCA30666 - xx uu**



Example: LCCA30666-12 = 12 inches long cable  
LCCA30666-100cm = 100 cm long cable

N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# N Male to SMA Male Right Angle Cable Assembly using RG58 Coax, 6 FT

## L-com CAD Drawing

REVISIONS		DATE	APPROVED
REV.	DESCRIPTION		
A	INITIAL RELEASE	15-09-2020	SELLIS

N MALE

SMA MALE  
RIGHT ANGLE

LENGTH MEASURED  
FROM CONTACT TO CONTACT

2X HEAT SHRINK TUBE,  
BLACK

RG58C COAX CABLE

LABEL

WWW.L-COM.COM  
L-COM P/N  
(SEE NOTE 1)

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
L-COM GLOBAL CONNECTIVITY.  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

<p><b>an INFINITE brand</b> 50 High Street, West Mill, 3rd Floor, Suite #30 North Andover, MA 01845 USA. Phone: 1.800.341.5266   1.978.682.6936 Fax: 1.978.689.9484 Website: www.L-com.com E-mail: CustomerService@L-com.com</p>	<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p><b>TOLERANCES:</b></p> <table style="width: 100%; border: none;"> <tr> <td>.X ± .2 [ .08]</td> <td>FRACTIONS ± 1/32</td> </tr> <tr> <td>.XX ± .02 [ .51]</td> <td>ANGLES ± 1°</td> </tr> <tr> <td>.XXX ± .005 [ .13]</td> <td></td> </tr> </table> <p><b>CABLE LENGTH (L) TOLERANCES:</b></p> <table style="width: 100%; border: none;"> <tr> <td>L ≤ 12 [305]</td> <td>± 1 [25] / -0</td> </tr> <tr> <td>12 [305] &lt; L ≤ 60 [1524]</td> <td>± 2 [61] / -0</td> </tr> <tr> <td>60 [1524] &lt; L ≤ 120 [3048]</td> <td>± 4 [102] / -0</td> </tr> <tr> <td>120 [3048] &lt; L ≤ 300 [7620]</td> <td>± 6 [152] / -0</td> </tr> <tr> <td>300 [7620] &lt; L</td> <td>± 9.5% L / -0</td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	.X ± .2 [ .08]	FRACTIONS ± 1/32	.XX ± .02 [ .51]	ANGLES ± 1°	.XXX ± .005 [ .13]		L ≤ 12 [305]	± 1 [25] / -0	12 [305] < L ≤ 60 [1524]	± 2 [61] / -0	60 [1524] < L ≤ 120 [3048]	± 4 [102] / -0	120 [3048] < L ≤ 300 [7620]	± 6 [152] / -0	300 [7620] < L	± 9.5% L / -0
.X ± .2 [ .08]	FRACTIONS ± 1/32																
.XX ± .02 [ .51]	ANGLES ± 1°																
.XXX ± .005 [ .13]																	
L ≤ 12 [305]	± 1 [25] / -0																
12 [305] < L ≤ 60 [1524]	± 2 [61] / -0																
60 [1524] < L ≤ 120 [3048]	± 4 [102] / -0																
120 [3048] < L ≤ 300 [7620]	± 6 [152] / -0																
300 [7620] < L	± 9.5% L / -0																
<p>SIZE A</p> <p>CAGE CODE [DRAWN BY] PART NUMBER</p> <p>A 43321 MVEERAPPAN LCCA30666</p>	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p> <p>REV A</p>																

- NOTES:**
- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END,  
6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev D