



LCCA30667-FT6

Configuration

Connector 1: N Male

Connector 2: SMA Female

• Cable Type: RG58


Features

- 50 Ohm RF (Radio Frequency) Transmission
- RG58 stranded center conductor enhances flexibility

Applications

- · RFID systems up to 1 GHz
- · General Purpose Test and Measurements

- · Same day shipping available
- · Heat shrink strain relief for a highly durable RF cable assembly
- · Wireless Infrastructure
- GPS Timing and telematics

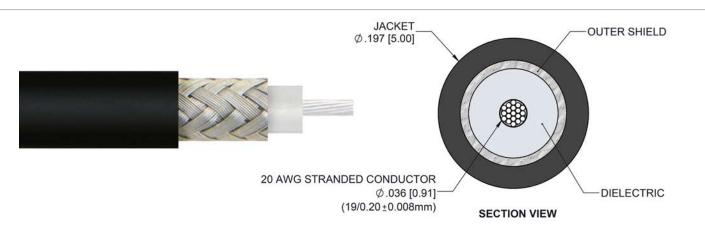

Description

L-com's LCCA30667-FT6 is a N male to SMA female cable assembly using RG58 coax, 6 FT and ships same-day. The RG58 coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to SMA cable assembly has a male to female gender configuration with flexible RG58 series coax and operates to 1 GHz. The shielding of this N cable is comprised of tinned copper braid.

Custom versions of this N male to N female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30667-FT6 L-com N Male to SMA Female Cable Assembly using RG58 Coax, 6 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	





LCCA30667-FT6

Velocity of Propagation	69.5	%
Capacitance	16.1 [52.82]	pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units	
Frequency	50	100	200	400	1,000	MHz	
Insertion Loss (Typ.)	0.4	0.5	0.63	0.88	1.5	dB	

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length 72 in [182.88 cm]

Cable

Cable TypeRG58Impedance50 OhmsInner Conductor TypeStrandedInner Conductor Material and PlatingCopper, Silver

Dielectric Type PTFE
Number of Shields 1

Shield Layer 1 Tinned Copper Braid
Jacket Material PVC, Black

Jacket Diameter 0.197 in [5 mm]

Repeated Minimum Bend Radius 2 in [50.8 mm]





LCCA30667-FT6

Connectors

SMA Female 50 Ohms Brass, Gold PTFE
Brass, Gold
,
DTEE
FIFE
Brass, Nickel
Brass, Nickel
5/16 inch

Environmental Specifications

Temperature

Operating Range -20 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:





LCCA30667-FT6

How to Order



Example: LCCA30667-12 = 12 inches long cable LCCA30667-100cm = 100 cm long cable

N Male to SMA Female Cable Assembly using RG58 Coax, 6 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

