

## Low Loss SMA Male Right Angle to SMA Male Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink



### LCCA9934

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

#### Description

L-com's LCCA9934 is a low loss SMA male right angle to SMA male cable assembly using LMR-240-UF coax with Times Microwave components with heatshrink and ships same-day. The LMR-240-UF coax of this SMA cable uses the PE (F) dielectric with a VoP of 84%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com SMA to SMA cable assembly has a male to male gender configuration with flexible LMR-240-UF series coax and operates to 3 GHz. The double shield of this SMA cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. This right angle SMA cable interface on the LMR-240-UF coax allows for easier connections in tight spaces.

Custom versions of this SMA male to SMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA9934 L-com Low Loss SMA Male Right Angle to SMA Male Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]
Dielectric Withstanding Voltage (DC)			1,500	Vdc
Jacket Spark			5,000	Vrms
Input Power (Peak)			5.6	KWatts

#### Specifications by Frequency

Low Loss SMA Male Right Angle to SMA Male  
Cable Assembly using LMR-240-UF Coax With  
Times Microwave Components with HeatShrink



**LCCA9934**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	100	250	500	1000	3000	
LCCA9934	Custom Lengths Available	Insertion Loss (Typ.)	0.028	0.046	0.066	0.095	0.168	dB/ft	
			0.1	0.16	0.22	0.32	0.56	dB/m	
LCCA9934-12	12 inch	Insertion Loss (Typ.)	0.33	0.35	0.37	0.4	0.47	dB	0.071
LCCA9934-24	24 inch	Insertion Loss (Typ.)	0.36	0.4	0.44	0.49	0.64	dB	0.104
LCCA9934-36	36 inch	Insertion Loss (Typ.)	0.39	0.44	0.5	0.59	0.81	dB	0.136
LCCA9934-60	60 inch	Insertion Loss (Typ.)	0.44	0.53	0.63	0.78	1.14	dB	0.2
LCCA9934-300	300 inch	Insertion Loss (Typ.)	1	1.45	1.95	2.68	4.5	dB	0.84

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB  
 Loss due to Connector 2: 0.1 dB  
 Base Weight: 0.071 pounds  
 Additional Weight per Inch: 0.00267 pounds

Electrical Specification Notes:  
 Values at 25°C, sea level.

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.5 in [12.7 mm]  
 Weight 0.17 lbs [77.11 g]

**Cable**

Cable Type LMR-240-UF  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PE (F)  
 Number of Shields 2  
 Shield Layer 1 Aluminum Tape  
 Shield Layer 2 Tinned Copper Braid  
 Jacket Material TPE  
 Jacket Diameter 0.24 in [6.1 mm]  
 One Time Minimum Bend Radius 0.75 in [19.05 mm]  
 Repeated Minimum Bend Radius 2.5 in [63.5 mm]  
 Bending Moment 0.13 lbs-ft [0.18 N-m]

Low Loss SMA Male Right Angle to SMA Male Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink



## LCCA9934

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification		ASTM B488
Dielectric Type	PTFE	Teflon
Body Material and Plating	Stainless Steel, Passivated	Passivated Stainless Steel
Body Plating Specification		SAE-AMS-2700
Coupling Nut Material and Plating		Passivated Stainless Steel
Coupling Nut Plating Specification		SAE-AMS-2700

### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

Low Loss SMA Male Right Angle to SMA Male Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink




**LCCA9934**

**Typical Performance Data**

**How to Order**

Part Number Configuration:

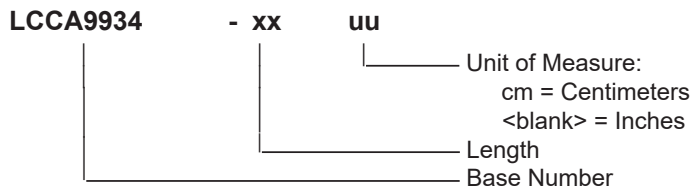

Example:    LCCA9934-12 = 12 inches long cable  
              LCCA9934-100cm = 100 cm long cable

Low Loss SMA Male Right Angle to SMA Male Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/sma-male-sma-male-cable-assembly-invalid-lcca9934-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# LCCA9934 CAD Drawing

Low Loss SMA Male Right Angle to SMA Male Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink

