

MCX Plug Right Angle Non-Magnetic Connector
Crimp/Solder Attachment for RG178



LCCN45866

Configuration

- MCX Plug Connector
- 50 Ohms
- Right Angle Body Geometry
- RG178 Interface Type
- Crimp/Solder Attachment
- Non-Magnetic Design

Features

- Max. Operating Frequency 6 GHz
- Excellent VSWR of 1.1:1
- Gold over Copper Plated Bronze Contact
- Magnetic Susceptibility 10^{-5}

Applications

- General Purpose Test
- Custom Cable Assemblies
- Medical
- Military and Aerospace
- Quantum Computing

Description

MCX Non-Magnetic Right Angle Plug Crimp type Connector LCCN45866 from L-Com is in stock at our warehouse and ready to ship on the same-day of your order. The LCCN45866 is a MCX Non-magnetic right-angle plug crimp type Connector compatible with RG178. These Non-Magnetic Connector frequency ranges from 0-6 GHz with 50 Ohms impedance.

Our RF coaxial connector specialists are available to answer any questions or concerns you have on the LCCN45866 MCX Non-Magnetic Right Angle Plug Crimp type Connector. Our Non-magnetic connectors have a susceptibility of around 10^{-5} , as opposed to 10^{-2} for standard connectors made of brass/nickel materials. As a result, our non-magnetic connectors are transparent to the magnetic field, which means no field distortion and a higher Signal-to-Noise Ratio (SNR).

Contact L-Com's expert technical support for assistance with the MCX Non-Magnetic right angle plug crimp type Connector or any RF coaxial cable connectors or cable assemblies. Download our LCCN45866 datasheet with specifications and CAD drawing with dimensions for details. Our knowledgeable sales team simplifies the purchasing process and ensures that your MCX Non-magnetic RF coaxial connector will be exact to your specifications. The target audience for the right-angle coaxial plug is for quantum computing, the military and aerospace industries as well as the medical industry including MRI and patient monitoring devices.

The LCCN45866 connector from L-Com uses a dedicated manufacturing process and raw material selection to guarantee the low magnetic susceptibility level of the connectors. The MCX right angle RF coax connector is available now from L-Com. We have no MOQ (minimum order quantity) and the connector ships the very same day from our warehouse.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.1:1	
Insertion Loss			0.5	dB
Operating Voltage (AC)			170	Vrms
Dielectric Withstanding Voltage (AC)			500	Vrms
Insulation Resistance	1,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178 LCCN45866](#)

MCX Plug Right Angle Non-Magnetic Connector
Crimp/Solder Attachment for RG178



LCCN45866

Mechanical Specifications

Size

Length	0.47 in [11.90 mm]
Width	0.20 in [5.00 mm]
Height	0.20 in [5.00 mm]
Weight	0.00 lbs [0.90 g]
Mating Cycles	500 Cycles

Material Specifications

Description	Material	Plating
Contact	Bronze	Gold over Copper
Body	Bronze	Copper-Tin-Zinc Alloy

Environmental Specifications

Temperature

Operating Range	-55deg C to +125deg C
-----------------	-----------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178 LCCN45866](#)

MCX Plug Right Angle Non-Magnetic Connector
Crimp/Solder Attachment for RG178

LCCN45866



Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Assembly Instruction


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178 LCCN45866](#)

MCX Plug Right Angle Non-Magnetic Connector
Crimp/Solder Attachment for RG178


LCCN45866



COMPONENTS

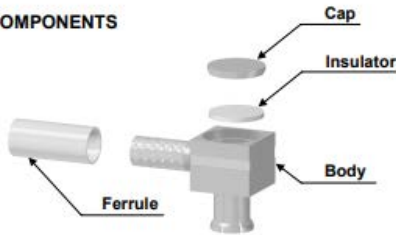

STRIPPING DIMENSIONS



1
Slide the ferrule onto the cable.
Strip the cable.
Tin the cable inner conductor.

4
Crimp the ferrule with crimping tool (see connector TDS).
Solder the inner conductor.

2
Fan the braid.

5
Place the insulator into the body.
Place the cap into the body.

3
Push the connector body under the braid.
Slide the ferrule over the braid.

6
Slide mounting tool R282.868.000 onto the body grooves.
Press fit the cap turning tool handle with the adapted wrench of 7mm AF (cap in the same plane than the body square face).

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178 LCCN45866](#)

MCX Plug Right Angle Non-Magnetic Connector
Crimp/Solder Attachment for RG178



LCCN45866

MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178 from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components. Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178 LCCN45866

URL: <https://www.l-com.com/mcx-male-right-angle-connector-crimp-solder-attachment-lccn45866-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document. The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

MCX Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG178

L-com CAD Drawing

