

10 Watt RF Load DC to 6 GHz With 2.2-5 Male Brass Body



LCTR1163

Features

- DC to 6 GHz Frequency Range
- 50 Ohm Impedance
- 2.2-5 Male Coaxial Interface
- Max VSWR 1.25:1
- Max Power 10 Watts (CW)

Applications

- 5G Cellular bands
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

Description

L-com's PE6TR1163 is an RF termination (also called RF load or dummy load) that operates from DC to 6 GHz and handles up to 10 Watt (CW). Our 2.2-5 termination / load has a male gender. PE6TR1163 2.2-5 load termination offers 1.25:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. L-com offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power (CW)			10	Watts
Input Power (Peak) 8% Duty Cycle, 20us PW			100	Watts

Mechanical Specifications

Size

Length	1.61 in [40.89 mm]
Width	0.63 in [16 mm]
Height	0.63 in [16 mm]
Weight	0.12 lbs [54.43 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[10 Watt RF Load DC to 6 GHz With 2.2-5 Male Brass Body LCTR1163](#)

10 Watt RF Load DC to 6 GHz With 2.2-5 Male Brass Body



LCTR1163

Configuration

Connector 2.2-5 Male

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Silver
Insulation	PTFE	
Body	Brass	Copper-Tin-Zinc Alloy
Housing	Brass	Tri-Metal

Environmental Specifications

Temperature

Operating Range -40 to +75 deg C
Storage Range -50 to +85 deg C

Humidity <95%
Shock IEC 60068-2-27
Vibration IEC 60068-2-6-Fc
Altitude <5000m
Thermal Shock IEC 60068 -2-14-Na

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


10 Watt RF Load DC to 6 GHz With 2.2-5 Male Brass Body from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components. Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 10 Watt RF Load DC to 6 GHz With 2.2-5 Male Brass Body LCTR1163

URL: <https://www.l-com.com/6ghz-10w-rf-termination-2.2-5-male-lctr1163-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document. The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

10 Watt RF Load DC to 6 GHz With 2.2-5 Male Brass Body

L-com CAD Drawing

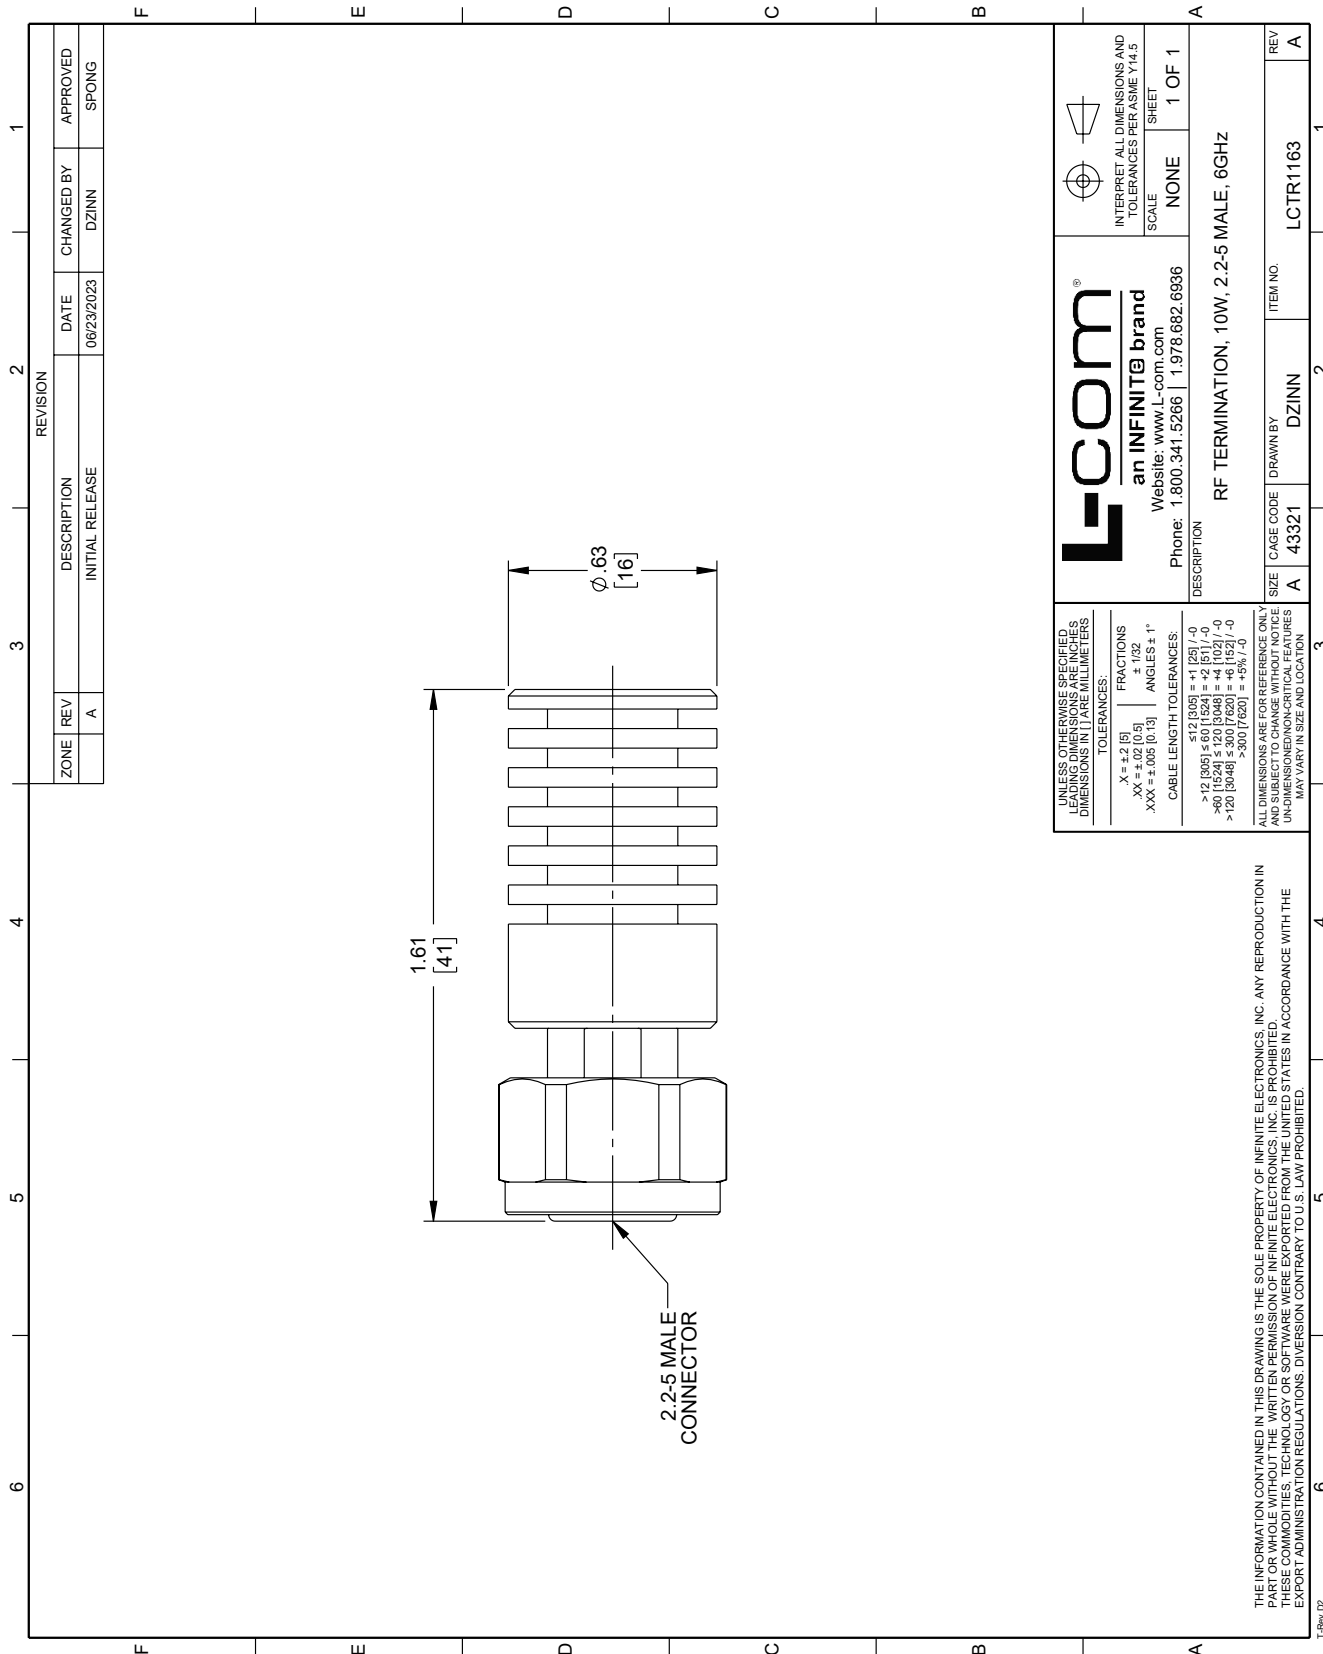

REVISION			
ZONE	REV	DESCRIPTION	DATE
	A	INITIAL RELEASE	06/23/2023
		CHANGED BY	DZINN
		APPROVED	SPONG

L-com
an INFINITE brand
Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
SCALE NONE SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, DIMENSIONS IN PARENT BRACKETS ARE IN MILLIMETERS.

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ±.132
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = ±1 [25] / -0
>12 [305] ≤60 [1524] = ±2 [51] / -0
>60 [1524] ≤120 [3048] = ±4 [102] / -0
>120 [3048] ≤300 [7620] = ±5% / -0

DESCRIPTION
RF TERMINATION, 10W, 2.2-5 MALE, 6GHZ

SIZE A CAGE CODE 43321 DRAWN BY DZINN ITEM NO. LC1TR1163

REV A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev: 02