


Low Loss Flexible LMR-LW600 Light Weight Coax  
Cable Double Shielded with Black PE Jacket



**LMR-LW600-LC-BULK**

**Configuration**

- Low Loss, Outdoor Flexible Cable
- 2 Shield(s)

**Features**

- PE Jacket
- Max Operating Temperature +85°C
- Min Install Bend Radius of 1.5 inches
- Phase Velocity 85% VoP
- Max Operating Frequency of 6 GHz
- Light Weight Coax

**Applications**

- Antenna Installations
- RF Test Systems
- General Purpose RF Interconnect
- Laboratory Applications

**Description**

LMR-LW600-LC-BULK coax cable from L-com is only one of a large number of radio frequency coaxial cable types specifically stocked to be ready for quick shipment. L-com LMR-LW600-LC-BULK coax cable is manufactured in a flexible design and has a 50 Ohm impedance. This low loss flexible 50 Ohm coax cable LMR-LW600-LC-BULK is constructed with a 0.590 inch diameter and Black PE jacket.

LMR-LW600-LC-BULK flexible 50 Ohm coax cable with PVC jacket is rated for a 6 GHz maximum operating frequency. This 50 Ohm 0.590 inch diameter and low loss flexible coax cable is built with a double shield count and RF shielding of 90 dB. L-com LMR-LW600-LC-BULK coax is constructed with Foam PE dielectric and a maximum operating temperature of +85 degrees C. Times Microwave LMR-LW600-LC-BULK coax cable specs for this wire properties can be found on its RF coax cable LMR-LW600-LC-BULK datasheet.


LMR-LW600-LC-BULK cable is part of more than one million RF, microwave parts in stock at L-com. This Times Microwave low loss LMR-LW600-LC-BULK coax cable is ready to buy and can be shipped worldwide. L-com also maintains a wide selection of other radio frequency coaxial cable types that ship same-day from our warehouse as with the rest of our other RF/microwave components.

\* LMR™ is a trademark of Times Microwave Systems.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
Velocity of Propagation		85		%
Time Delay		1.17 [3.84]		ns/ft [ns/m]
Shielding Effectiveness	90			dB
Dielectric Withstanding Voltage (DC)			4,000	Vdc
Jacket Spark			8,000	Vrms
Nominal Capacitance		23.4 [76.77]		pF/ft [pF/m]

Low Loss Flexible LMR-LW600 Light Weight Coax  
Cable Double Shielded with Black PE Jacket



**LMR-LW600-LC-BULK**

Nominal Inductance	0.058 [0.19]		uH/ft [uH/m]
Input Power (Peak)		40	kWatts

**Performance by Frequency Band**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.05	0.15	0.45	0.9	1.5	GHz
Attenuation, Typ	0.5	1	1.2	1.7	2.5	dB/100ft
	1.64	3.28	3.94	5.58	8.2	dB/100m
Input Power (CW), Max	4,240	2,410	1,970	1,350	930	Watts

Description	F6	F7	F8	F9	F10	Units
Frequency	1.8	2	2.5	5.8	8	GHz
Attenuation, Typ	3.3	3.7	3.9	4.4	7.3	dB/100ft
	10.83	12.14	12.8	14.44	23.95	dB/100m
Input Power (CW), Max	700	630	590	520	320	Watts


**Mechanical Specifications**

Diameter	0.59 in 14.99 mm
Weight	0.099 lbs/ft [0.15 kg/m]
Min. Bend Radius (Installation)	1.5 in [38.1 mm]
Min. Bend Radius (Repeated)	6 in [152.4 mm]
Bending Moment	2.75 lbs-ft [3.73 N-m]
Tensile Strength	260 lbs [117.93 kg]
Flat Plate Crush	60 lbs/in [1.07 kg/mm]

**Construction Specifications**

Description	Material and Plating	Diameter
Inner Conductor	Copper , 1 Strands Strand(s)	0.176in 4.47mm
Conductor Type	Solid	
Dielectric	Foam PE	0.455in 11.56mm
First Shield	Aluminum Tape	
Second Shield	Aluminium	
Jacket	PE, Black	0.59in 14.99mm

Low Loss Flexible LMR-LW600 Light Weight Coax  
Cable Double Shielded with Black PE Jacket



## LMR-LW600-LC-BULK

### Environmental Specifications

#### Temperature

Operating Range	-40deg C to +85deg C
Installation Range	-40deg C to +85deg C
Storage Range	-70deg C to +85deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data



Low Loss Flexible LMR-LW600 Light Weight Coax Cable Double Shielded with Black PE Jacket from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# Low Loss Flexible LMR-LW600 Light Weight Coax Cable Double Shielded with Black PE Jacket

L-com CAD Drawing

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	03/28/2022
		APPROVED BY: AGANWANI

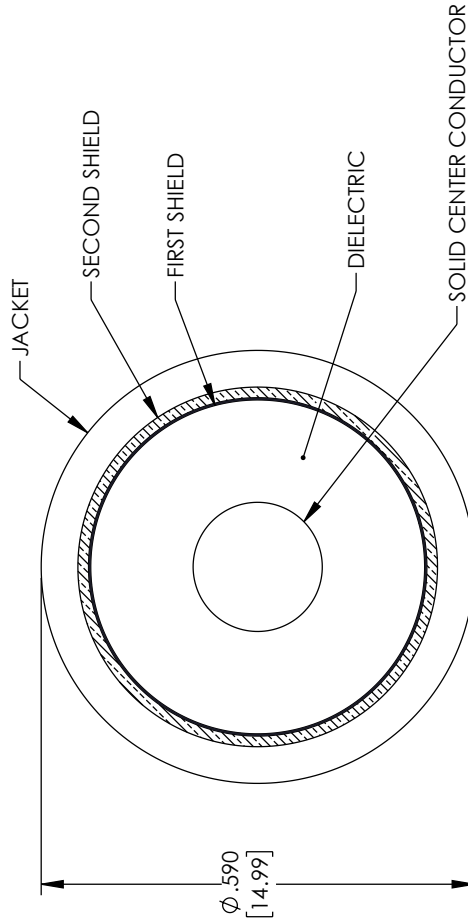

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>X = ± .2 [5.08]      FRACTIONS ± 1/32</p> <p>.XX = ± .02 [.51]      ANGLES ± 1°</p> <p>.XXX = ± .005 [.13]</p> <p>CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] = +1 [25] / -0</p> <p>12 [305] &lt; L ≤ 60 [1524] = +2 [51] / -0</p> <p>60 [1524] &lt; L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] &lt; L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] &lt; L = +5%L / -0</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p>
<p>SIZE: A</p> <p>CAGE CODE: 43321</p> <p>DRAWN BY: DZINN</p> <p>ITEM NO.: LMR-LW600-LC-BULK</p>	<p>SCALE: N/A</p> <p>REV: A</p>

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

1-Rev.0